

A Novel Mixed and Energy-Momentum Consistent Framework for Coupled Nonlinear Thermo-Electro-Elastodynamics

Marlon Franke^{1*}, Felix Zähringer¹, Moritz Hille¹, Rogelio Ortigosa², Peter
Betsch¹, and Antonio J. Gil³

¹Institute of Mechanics, Karlsruhe Institute of Technology (KIT), Germany

²Computational Mechanics and Scientific Computing Group, Technical University of Cartagena, Spain

³Zienkiewicz Centre for Computational Engineering, College of Engineering, Swansea University, Bay
Campus, SA1 8EN, United Kingdom

January 17th, 2023

A novel mixed framework and energy-momentum consistent integration scheme in the field of coupled nonlinear thermo-electro-elastodynamics is proposed. The mixed environment is primarily based on a framework for elastodynamics in the case of polyconvex strain energy functions. For this elastodynamic framework, the properties of the so-called tensor cross product are exploited to derive a mixed formulation via a Hu-Washizu type extension of the strain energy function. Afterwards, a general path to incorporate non-potential problems for mixed formulations is demonstrated. To this end, the strong form of the mixed framework is derived and supplemented with the energy balance as well as Maxwell's equations neglecting magnetic and time dependent effects. By additionally choosing an appropriate energy function, this procedure leads to a fully coupled thermo-electro-elastodynamic formulation which benefits from the properties of the underlying mixed framework. In addition, the proposed mixed framework facilitates the design of a new energy-momentum consistent time integration scheme by employing discrete derivatives in the sense of Gonzalez. A one-step integration scheme of second-order accuracy is obtained which is shown to be stable even for large time steps. Eventually, the performance of the novel formulation is demonstrated in several numerical examples.

Keywords: nonlinear thermo-electro-elastodynamics, polyconvexity, tensor cross product, non-potential mixed formulation, energy-momentum scheme.

1 Introduction

Electroactive polymers (EAPs) represent a class of multi-functional materials capable of displaying significant changes in their shape when actuated by means of an electrical stimulus [PKJ98].

* Corresponding author: marlon.franke@kit.edu

These can be broadly grouped into ionic polymers and electronic EAPs. In the former, the application of an electric field triggers an internal transport of ions, which ultimately yields bending type deformations. In the latter, however, Coulomb forces are responsible for the electrically induced deformations of the EAPs, which can result in more complex shape changes compared to their ionic counterparts.

Among electronic EAPs, dielectric elastomers (DEs) have demonstrated remarkable electrically induced actuation properties facilitated by their lightness, fast response, biomimetism, and low stiffness properties [Pel+00; Pel+02]. DEs are indeed capable of exhibiting massive electrically induced deformations, as demonstrated by experimental studies [Li+13], where electrically induced area expansions of 1962% in DEs have been reported. As a result, DEs have been identified as ideal candidates for their use in the field of soft robotics, where cutting-edge technological developments start evidencing the onset of a paradigm switch: Traditional hard robotic systems will be replaced by soft robotic solutions [Maj19], especially in applications requiring safe interactions with humans or, when *human avatars* are demanded in extremely hazardous environmental conditions [Orb+21]. However, the applications of DEs are not limited to the field of electrically induced actuation, as DEs have been successfully applied as Braille displays, deformable lenses, haptic devices, and energy generators, to name but a few [Kof+03].

Advances in the field of soft robotics can be accelerated through high fidelity finite element simulations for which a reliable material characterization of these materials, and of DEs in particular, is of major importance. Recently, Mehnert et al. [MHS19] devoted great effort to the mechanical and coupled electro-mechanical characterization of so-called very high bond (VHB) polymers. This characterization was extended to account for the thermo-viscoelastic behavior in these materials. The experimental works in [HVS15; Lia+20; MHS19; MHS21b] enabled a comprehensive characterization of the thermo-electro-viscoelastic properties of particle filled silicone EAPs. Crucially, the characterization conducted on these experimental studies has led to subsequent works with deep roots in continuum mechanics, thermodynamics, and even micromechanics. In [MHS21a], the analytical strain energy function is formulated based on thermo-electro-mechanical invariants and internal variables (accounting for viscoelastic effects). A calibration of the analytical constitutive model was carried out by fitting their response to the data generated in the experimental work using optimization techniques. Crucially, as proven by the aforementioned works, the performance of DEs is highly sensitive to temperature variations and its consideration is of paramount importance. This is for instance the case, when understanding the dynamics of DE-based soft robotic underwater applications [Ber+18], where the temperature of the surrounding fluid might vary. Accordingly, these findings clearly justify the necessity of embedding temperature effects into the constitutive models of DEs.

Analytical constitutive models should not only approximate the available data of the material response (whether available from experiments or analytical computations or computational homogenization), but also comply with physical requirements, i.e., objectivity, material symmetry, etc. [BGW16; GS08]. Further mathematical assumptions have to be embedded by realistic constitutive models. It is well assumed that these must satisfy the ellipticity or rank-one convexity condition [Bal76]. This condition prevents the formation of extremely localized deformation modes, guarantees the propagation of real travelling plane waves in the material [SNB05], and ensures the well-posedness of the underlying boundary value problem [MH94]. A sufficient condition complying with the ellipticity condition is the polyconvexity [Bal76; SN03] of the strain energy function (analytical constitutive model). This concept was later extended from elasticity to the field of nonlinear electro-mechanics [GO16; OG16a; OG16b].

In addition to reliable and physically-mathematically sound constitutive models, long-term time dependent finite element simulations of DEs require the use of stable and robust spatial and temporal discretizations. In this vein, energy-momentum (EM) time integration schemes emerge as elegant and robust candidates, proving higher stability and robustness properties than other classical time integration schemes [CG17; Gon00; GB10; HB11; ST92]. The underlying reason for this lies in their thermodynamic roots, as they are endowed by construction with the discrete analogue of the conservation properties of the continuum, namely the conservation of total energy, total linear momentum, and total angular momentum. Consistency of these methods, namely their ability to conserve (or dissipate for non-reversible constitutive models) the total energy of a system in agreement with the laws of thermodynamics [ST92], is attained by replacing the (exact) partial derivatives of the strain energy function (or other types of energy like, e.g., the internal energy function) with respect to its arguments with their carefully designed algorithmic counterparts.

Recently, Betsch et al. [BJH18] proposed a novel EM scheme in the context of nonlinear elasticity, by taking advantage of the concept of polyconvexity and the use of a novel tensor cross product pioneered by de Boer [de 82] and re-discovered in the context of nonlinear continuum mechanics by Bonet et al. [BGO15; BGO16]. In essence, the authors in [BJH18] proposed the consideration of three discrete derivatives which were used to form an algorithmic version of the second Piola-Kirchhoff stress tensor. These three discrete derivatives represent the algorithmic counterparts of the work conjugates of the right Cauchy-Green deformation tensor, its cofactor, and its determinant. This strategy leads to a simplified expression of the algorithmic second Piola-Kirchhoff stress tensor, compared to those obtained by the classical approach [Gon00; ST92]. Later, this work has been extended to multiphysics scenarios such as thermoelasticity [Fra+18; Ort+20], nonlinear electro-mechanics [Fra+19; Ort+18], and more recently to thermo-electro-mechanics [Fra+22a]. In [Fra+22a], a simple thermo-electro-mechanical constitutive model is considered in which the thermal effects are coupled exclusively with the volumetric deformations, excluding any direct interaction between thermal and electrical effects. The present work aims at incorporating more generic and sophisticated constitutive models. In addition, it advocates for a multi-field formulation where not only displacements, electric potential, and temperature are regarded as unknown fields. Rather, strains, electric displacement, and suitable stress-type Lagrange multipliers, are incorporated as unknown fields, relying on a stable spatial discretization of all fields involved. In that regard, a noteworthy contribution lies in the introduction of a general path to incorporate non-potential problems for mixed formulations, where this path is not limited to the considered area of thermo-electro-elastodynamics.

The manuscript is organized as follows: Sect. 2 describes the multiphysics initial boundary value problem (IBVP) associated with the underlying governing equations for DEs in non-isothermal scenarios. Sect. 3 introduces the necessary elements of algebra associated with the tensor cross product operation. In this context, the tensor cross product is used to conveniently rewrite the cofactor of the deformation gradient. Furthermore, this section presents the analytical constitutive model considered. In addition, a Hu-Washizu type variational formulation for the purely mechanical elastostatic case is presented. From its stationary conditions, the associated multi-field strong form is derived. This strong form serves as a starting point for the subsequent extension to the non-conservative multiphysics case of interest, where electrical and thermal effects are incorporated. Sect. 4 presents the weak form of the multi-field multiphysics IBVP presented at the end of Sect. 3. Additionally, the conservation properties of the proposed continuous formulation are examined. Sect. 5 illustrates the algorithmic treatment of the weak form in Sect. 4, where

derivatives of the analytical constitutive model are replaced with their algorithmic counterparts to embed the desired conservation properties into the resulting EM time integration scheme. Sect. 6 presents the spatial discretization of the algorithmic weak form shown in Sect. 5. Eventually, numerical tests are conducted throughout Sect. 7 with the aim of testing the spatial and temporal convergence properties of the proposed multi-field EM time integrator, as well as its long-term stability. Finally, concluding remarks are provided in Sect. 8.

2 Nonlinear continuum thermo-electro-mechanics

We consider a deformable continuum body \mathcal{B} with boundary $\partial\mathcal{B}$ subject to time $t \in \mathcal{I} = [0, T]$, where $T \in \mathbb{R}^+$. We distinguish between the reference configuration $\mathcal{B}_0 \subset \mathbb{R}^3$ and the current configuration $\mathcal{B}_t = \varphi(\mathcal{B}_0, t)$, where $\varphi : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}^3$ denotes the bijective mapping that maps material coordinates $\mathbf{X} \in \mathcal{B}_0$ to its spatial counterparts $\mathbf{x} = \varphi(\mathbf{X}, t) \in \mathcal{B}_t$.

2.1 Initial boundary value problem

The IBVP for thermo-electro-mechanics is obviously composed of contributions from the mechanical, the thermal, and the electrical fields and is introduced in the following.

2.1.1 Elastodynamics

The basic kinematic quantity in elastodynamics is the deformation gradient $\mathbf{F} : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}^{3 \times 3}$ defined as

$$\mathbf{F} = \nabla_{\mathbf{X}} \varphi(\mathbf{X}, t), \quad d\mathbf{x} = \mathbf{F} d\mathbf{X}, \quad (1)$$

which maps infinitesimal line elements $d\mathbf{X} \in \mathcal{B}_0$ to their spatial counterparts $d\mathbf{x} \in \mathcal{B}_t$. The IBVP for elastodynamics is given by

$$\begin{aligned} \rho_0 \ddot{\varphi} &= \text{Div } \mathbf{P} + \bar{\mathbf{B}} && \text{in } \mathcal{B}_0 \times \mathcal{I}, \\ \mathbf{P} \mathbf{N} &= \bar{\mathbf{T}} && \text{on } \partial_T \mathcal{B}_0 \times \mathcal{I}, \\ \varphi &= \bar{\varphi} && \text{on } \partial_\varphi \mathcal{B}_0 \times \mathcal{I}, \\ \varphi(\mathbf{X}, 0) &= \varphi_0 && \text{in } \mathcal{B}_0, \\ \dot{\varphi}(\mathbf{X}, 0) &= \mathbf{v}_0 && \text{in } \mathcal{B}_0. \end{aligned} \quad (2)$$

The above set of equations is comprised of the balance of linear momentum (2)₁, where $\rho_0 : \mathcal{B}_0 \rightarrow \mathbb{R}$ is the material mass density, the dot ($\dot{\bullet}$) indicates material time differentiation of quantity (\bullet), $\mathbf{P} : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}^{3 \times 3}$ is the first Piola-Kirchhoff stress tensor, and $\bar{\mathbf{B}} : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}^3$ denotes the prescribed volume force per unit undeformed volume \mathcal{B}_0 . Furthermore, the Neumann boundary condition is given by (2)₂, where $\mathbf{N} : \partial_T \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}^3$ denotes the material outward normal vector to the Neumann boundary $\partial_T \mathcal{B}_0 \in \partial \mathcal{B}_0$, and $\bar{\mathbf{T}} : \partial_T \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}^3$ is the prescribed Piola stress vector. Equation (2)₃ denotes the Dirichlet boundary condition with the prescribed displacement field $\bar{\varphi}$ on $\partial_\varphi \mathcal{B}_0 \in \partial \mathcal{B}_0$. The whole boundary for the mechanical field is comprised of both introduced boundaries, which may not overlap, such that

$$\partial_T \mathcal{B}_0 \cup \partial_\varphi \mathcal{B}_0 = \partial \mathcal{B}_0, \quad \partial_T \mathcal{B}_0 \cap \partial_\varphi \mathcal{B}_0 = \emptyset. \quad (3)$$

Finally, (2)₄-(2)₅ are the initial conditions for configuration and velocity with φ_0 and \mathbf{v}_0 being the initial configuration and velocity, respectively.

2.1.2 Thermodynamics

The IBVP for thermodynamics is given by

$$\begin{aligned}
\theta \dot{\eta} &= \bar{R} - \text{Div } \mathbf{Q} && \text{in } \mathcal{B}_0 \times \mathcal{I}, \\
\mathbf{Q} \cdot \mathbf{N} &= -\bar{Q} && \text{on } \partial_Q \mathcal{B}_0 \times \mathcal{I}, \\
\theta &= \bar{\theta} && \text{on } \partial_\theta \mathcal{B}_0 \times \mathcal{I}, \\
\theta(\mathbf{X}, 0) &= \theta_0 && \text{in } \mathcal{B}_0,
\end{aligned} \tag{4}$$

where (4)₁ denotes the local energy balance with $\theta : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}^+$ being the absolute temperature field and $\eta : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}$ is the entropy density. Furthermore, $\bar{R} : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}$ denotes a prescribed heat source per unit undeformed volume \mathcal{B}_0 and $\mathbf{Q} : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}^3$ denotes the Piola heat flux vector per unit undeformed volume \mathcal{B}_0 . Equations (4)₂ and (4)₃ are the Neumann and Dirichlet boundary conditions, respectively. Therein, $\bar{Q} : \partial_Q \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}$ denotes a prescribed rate of heat transfer across a unit of undeformed area applied on $\partial_Q \mathcal{B}_0 \subset \partial \mathcal{B}_0$. Essential temperature boundary conditions $\bar{\theta}$ are applied on $\partial_\theta \mathcal{B}_0 \subset \partial \mathcal{B}_0$. The boundaries for the thermal field in (4) need to satisfy

$$\partial_Q \mathcal{B}_0 \cup \partial_\theta \mathcal{B}_0 = \partial \mathcal{B}_0, \quad \partial_Q \mathcal{B}_0 \cap \partial_\theta \mathcal{B}_0 = \emptyset. \tag{5}$$

Eventually, the initial thermal field is prescribed in (4)₄ with the initial temperature θ_0 .

2.1.3 Electrostatics

Restricting our focus to capacitor-like DEs allows us to neglect magnetic and time-dependent electrical effects. Thus, it is possible to reduce Maxwell's equations to

$$\begin{aligned}
\text{Div } \mathbf{D}_0 &= \bar{\rho}_0^e && \text{in } \mathcal{B}_0 \times \mathcal{I}, \\
\mathbf{E}_0 &= -\nabla_{\mathbf{X}} \Phi && \text{in } \mathcal{B}_0 \times \mathcal{I}, \\
\mathbf{D}_0 \cdot \mathbf{N} &= -\bar{\omega}_0^e && \text{on } \partial_\omega \mathcal{B}_0 \times \mathcal{I}, \\
\Phi &= \bar{\Phi} && \text{on } \partial_\Phi \mathcal{B}_0 \times \mathcal{I}.
\end{aligned} \tag{6}$$

Therein, $\mathbf{D}_0 : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}^3$ represents the Lagrangian electric displacement vector, $\bar{\rho}_0^e : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}$ is the prescribed electric volume charge per unit of undeformed volume \mathcal{B}_0 , and $\bar{\omega}_0^e : \partial_\omega \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}$ denotes the electric surface charge per unit of undeformed area $\partial_\omega \mathcal{B}_0 \subset \partial \mathcal{B}_0$. Furthermore, $\mathbf{E}_0 : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}^3$ represents the Lagrangian electric field vector and $\Phi : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}$ is the electric potential field which is prescribed with $\bar{\Phi}$ on $\partial_\Phi \mathcal{B}_0 \subset \partial \mathcal{B}_0$. The boundaries are composed of the Dirichlet and Neumann boundaries which may not overlap, thus

$$\partial_\omega \mathcal{B}_0 \cup \partial_\Phi \mathcal{B}_0 = \partial \mathcal{B}_0, \quad \partial_\omega \mathcal{B}_0 \cap \partial_\Phi \mathcal{B}_0 = \emptyset. \tag{7}$$

2.2 Constitutive equations

The behavior of body \mathcal{B}_0 is characterized by the chosen energy density function. For many applications it is important to incorporate coupling effects between the fields, i.e., to consider interactions between the mechanical, thermal, and electric fields. In doing so, we herein assume an energy function $\hat{\mathcal{F}} = \hat{\mathcal{F}}(\mathbf{F}, \mathbf{D}_0, \theta)$ (cf. [Fra+22a]). Considering the second law of thermodynamics, the constitutive equations

$$\mathbf{P} = \partial_{\mathbf{F}} \hat{\mathcal{F}}, \quad \mathbf{E}_0 = \partial_{\mathbf{D}_0} \hat{\mathcal{F}}, \quad \eta = -\partial_\theta \hat{\mathcal{F}}, \tag{8}$$

must hold for the first Piola-Kirchhoff stress tensor \mathbf{P} , the entropy density η , and the Lagrangian electric field vector \mathbf{E}_0 . Furthermore, the constitutive equations are supplemented by the Piola heat flux

$$\mathbf{Q} = -\mathbf{F}^{-1} \mathbf{K} \mathbf{F}^{-T} \boldsymbol{\gamma}, \quad (9)$$

which is governed by Duhamel's law of heat conduction. Therein, \mathbf{K} is the material thermal conductivity tensor and $\boldsymbol{\gamma} : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}^3$ denotes the material gradient of the absolute temperature field

$$\boldsymbol{\gamma} = -\nabla_{\mathbf{X}} \theta. \quad (10)$$

Assuming a suitable energy \mathcal{F} , and \mathbf{K} to be a positive semi-definite second-order tensor, the constitutive equations (8) and (9) satisfy the Clausius-Duhem inequality and can thus be regarded as thermodynamically consistent.

3 Advanced modeling aspects within the continuous description

In this section, we outline advanced modeling aspects within the continuous description. We want to emphasize that many of these aspects are not necessarily limited to the thermo-electro-mechanical system considered in Sect. 2, but can be applied to other problems as well. More precisely, we present a polyconvexity-inspired framework based on the tensor cross product operation, thermo-electro-mechanical constitutive models, a Hu-Washizu type mixed formulation for non-potential (coupled) systems and an alternative energy balance formulation to facilitate the design of the desired energy-momentum consistent time integration scheme. Eventually, we propose a multiphysics, mixed IBVP for thermo-electro-elastodynamics.

3.1 Polyconvexity-inspired framework

In order to find a polyconvexity-based energy density function describing the constitutive behavior of a DE, the tensor cross product operation between second-order tensors is introduced. Afterwards, kinematics and constitutive equations are reconsidered by the beneficial properties of the tensor cross product.

3.1.1 Tensor cross product

The tensor cross product was introduced in [de 82], exploited in the context of nonlinear continuum mechanics by [BGO15] and subsequently extended to multiphysics problems (cf. [Fra+19; Fra+22a; Fra+18; Ort+18; Ort+20]). It enables to simplify algebraic derivations, especially when polyconvex constitutive models are considered.

The tensor cross product between two second-order tensors $\mathbf{A}, \mathbf{B} \in \mathbb{R}^{3 \times 3}$ can be defined as

$$(\mathbf{A} \otimes \mathbf{B})_{ij} = \epsilon_{i\alpha\beta} \epsilon_{jab} \mathbf{A}_{\alpha a} \mathbf{B}_{\beta b}. \quad (11)$$

Therein, Einstein's summation convention is employed to pairs of repeated indices, where $i, j, \alpha, \beta, a, b \in \{1, 2, 3\}$. In addition, ϵ_{ijk} denotes the third-order permutation tensor. A noteworthy feature of the tensor cross product is that it allows to redefine the cofactor of a second-order tensor $\mathbf{A} \in \mathbb{R}^{3 \times 3}$ as

$$\text{cof}(\mathbf{A}) = \det(\mathbf{A}) \mathbf{A}^{-T} = \frac{1}{2} (\mathbf{A} \otimes \mathbf{A}). \quad (12)$$

Furthermore, the determinant of a second-order tensor $\mathbf{A} \in \mathbb{R}^{3 \times 3}$ can be written in an elegant manner as

$$\det(\mathbf{A}) = \frac{1}{6} (\mathbf{A} \otimes \mathbf{A}) : \mathbf{A}. \quad (13)$$

Some further helpful properties of the tensor cross product can be found, e.g., in [Fra+22a].

3.1.2 Kinematics

In addition to the deformation gradient \mathbf{F} in (1), alternative kinematic measures can be defined. More precisely, its cofactor $\mathbf{H} : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}^{3 \times 3}$ can now be defined with the help of the tensor cross product as in (12), namely

$$\mathbf{H} = \text{cof}(\mathbf{F}) = \frac{1}{2} \mathbf{F} \otimes \mathbf{F}, \quad \text{da} = \mathbf{H} \, \text{d}\mathbf{A}. \quad (14)$$

This allows to map infinitesimal material area elements $\text{d}\mathbf{A} \in \partial\mathcal{B}_0$ to their spatial counterparts $\text{d}\mathbf{a} \in \partial\mathcal{B}_t$. Furthermore, with the help of equation (13), the Jacobian determinant of \mathbf{F} can be written in terms of the tensor cross product as

$$J = \det(\mathbf{F}) = \frac{1}{6} (\mathbf{F} \otimes \mathbf{F}) : \mathbf{F}, \quad \text{d}v = J \, \text{d}V. \quad (15)$$

The Jacobian determinant maps infinitesimal volume elements of the reference configuration $\text{d}V \in \mathcal{B}_0$ to their spatial counterparts $\text{d}v \in \mathcal{B}_t$. For an objective (material frame indifferent) representation of the energy density function, we introduce the symmetric right Cauchy-Green strain tensor $\mathbf{C} : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}^{3 \times 3}$ with

$$\mathbf{C} = \mathbf{F}^T \mathbf{F}. \quad (16)$$

In addition to that, the cofactor of \mathbf{C} can be defined in a similar fashion as in (14), i.e.,

$$\mathbf{G} = \text{cof}(\mathbf{C}) = \mathbf{H}^T \mathbf{H} = \frac{1}{2} \mathbf{C} \otimes \mathbf{C}, \quad (17)$$

where $\mathbf{G} : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}^{3 \times 3}$. Eventually, we introduce the determinant of \mathbf{C} in analogy to (15), i.e.,

$$C = \det(\mathbf{C}) = J^2 = \frac{1}{6} (\mathbf{C} \otimes \mathbf{C}) : \mathbf{C}, \quad (18)$$

where $C : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}^+$.

3.1.3 Energy density function

We assume that the behavior of DEs can be characterized by means of the energy density function

$$\widehat{\mathcal{F}}(\mathbf{F}, \mathbf{D}_0, \theta) = \widetilde{\mathcal{F}}(\mathbf{F}, \text{cof}(\mathbf{F}), \det(\mathbf{F}), \mathbf{D}_0, \mathbf{d}(\mathbf{F}, \mathbf{D}_0), \theta) = \widetilde{\mathcal{F}}(\mathbf{F}, \mathbf{H}, J, \mathbf{D}_0, \mathbf{d}, \theta), \quad \mathbf{d} = \mathbf{F}\mathbf{D}_0, \quad (19)$$

where $\widetilde{\mathcal{F}} : \mathbb{R}^{3 \times 3} \times \mathbb{R}^{3 \times 3} \times \mathbb{R}^+ \times \mathbb{R}^3 \times \mathbb{R}^3 \times \mathbb{R}^+ \rightarrow \mathbb{R}$ is convex with respect to its arguments $\mathbf{F}, \mathbf{H}, J, \mathbf{D}_0, \mathbf{d}$ and concave with respect to θ . With the objective representation of the kinematics (see Sect. 3.1.2), we can re-express $\widetilde{\mathcal{F}}$ as

$$\widetilde{\mathcal{F}}(\mathbf{F}, \mathbf{H}, J, \mathbf{D}_0, \mathbf{d}, \theta) = \mathcal{F}^*(\mathbf{C}, \mathbf{G}, C, \mathbf{D}_0, \mathbf{C}\mathbf{D}_0, \theta) = \mathcal{F}(\mathbf{C}, \mathbf{G}, C, \mathbf{D}_0, \theta). \quad (20)$$

Example 1. *Inspired by the works [MHS18; Ver+13], we exemplarily consider the following additive decomposition of the energy density function $\mathcal{F}(\mathbf{C}, \mathbf{G}, C, \mathbf{D}_0, \theta)$ ^{1,2} as*

$$\mathcal{F}(\mathbf{C}, \mathbf{G}, C, \mathbf{D}_0, \theta) = f_\theta(\theta) \mathcal{F}_{\text{em}}(\mathbf{C}, \mathbf{G}, C, \mathbf{D}_0) + \mathcal{F}_{\text{tm}}(C, \theta) + \mathcal{F}_t(\theta), \quad (21)$$

¹ The model given in (20) is typically known as a modified entropic electro-elasticity model.

² It is important to remark that the proposed framework is not restricted to the suggested energy function given in (20).

where $\mathcal{F}_{\text{em}} : \mathbb{R}^{3 \times 3} \times \mathbb{R}^{3 \times 3} \times \mathbb{R}^+ \times \mathbb{R}^3 \rightarrow \mathbb{R}$ represents the electro-mechanical contribution to the energy density function, which, for example, can be additively decomposed into a compressible Mooney-Rivlin model (mechanical) and an ideal dielectric elastomer model (electro-mechanical), i.e.,

$$\mathcal{F}_{\text{em}}(\mathbf{C}, \mathbf{G}, C, \mathbf{D}_0) = a \operatorname{tr} \mathbf{C} + b \operatorname{tr} \mathbf{G} + \frac{c}{2} (\sqrt{C} - 1)^2 - d \log \sqrt{C} + \frac{1}{2 \varepsilon_r \varepsilon_0 \sqrt{C}} \mathbf{D}_0 \cdot (\mathbf{C} \mathbf{D}_0). \quad (22)$$

In the above, the mechanical parameters $a, b, c \in \mathbb{R}^+$ and $d = 2(a + 2b)$ have been employed. Moreover, the permittivity of vacuum is denoted by $\varepsilon_0 = 8.8541 \times 10^{-12} \text{ AsV}^{-1} \text{ m}^{-1}$ and $\varepsilon_r \in \mathbb{R}^+$ is the relative permittivity of the considered medium. Furthermore, $\mathcal{F}_{\text{tm}}(C, \theta) : \mathbb{R}^+ \times \mathbb{R}^+ \rightarrow \mathbb{R}$ represents the coupled thermo-mechanical contribution, for which we use³

$$\mathcal{F}_{\text{tm}}(C, \theta) = -3 \beta e (C - 1) (\theta - \theta_{\text{R}}), \quad (23)$$

following [Fra+22a]. Therein, $\beta, e \in \mathbb{R}^+$ are thermo-mechanical parameters and $\theta_{\text{R}} \in \mathbb{R}^+$ is the reference temperature. In addition, $\mathcal{F}_{\text{t}}(\theta) : \mathbb{R}^+ \rightarrow \mathbb{R}$ represents the purely thermal contribution [Fra+22a], defined as

$$\mathcal{F}_{\text{t}}(\theta) = \kappa \left(\theta - \theta_{\text{R}} - \theta \log \left(\frac{\theta}{\theta_{\text{R}}} \right) \right), \quad (24)$$

where $\kappa \in \mathbb{R}^+$ denotes the specific heat capacity. Finally, the factor $f_{\theta} : \mathbb{R}^+ \rightarrow \mathbb{R}^+$ in front of the electro-mechanical contribution $\mathcal{F}_{\text{em}} : \mathbb{R}^{3 \times 3} \times \mathbb{R}^{3 \times 3} \times \mathbb{R}^+ \times \mathbb{R}^3 \rightarrow \mathbb{R}$ is chosen as

$$f_{\theta}(\theta) = \frac{\theta}{\theta_{\text{R}}}, \quad (25)$$

following the work of [Ver+13]. Notice that multiplication of f_{θ} and \mathcal{F}_{em} aims at a fully coupled model (cf. [MHS18; Ver+13]), which contrasts with our previous publication [Fra+22a], where $f_{\theta} = 1$. Accordingly, the constitutive equations are given by

$$\mathbf{P} = \mathbf{F} \mathbf{S}, \quad \mathbf{S} = 2(\partial_{\mathbf{C}} \mathcal{F} + \partial_{\mathbf{G}} \mathcal{F} \otimes \mathbf{C} + \partial_C \mathcal{F} \mathbf{G}), \quad \mathbf{E}_0 = \partial_{\mathbf{D}_0} \mathcal{F}, \quad \eta = -\partial_{\theta} \mathcal{F}, \quad (26)$$

where $\mathbf{S} : \mathcal{B}_0 \times \mathcal{I} \rightarrow \mathbb{R}^{3 \times 3}$ denotes the second Piola-Kirchhoff stress tensor. In addition, assuming thermal isotropy, Duhamel's law of heat conduction (9) reduces to Fourier's law of heat conduction. Accordingly, with $\mathbf{K} = k_0 \mathbf{I}$ we obtain

$$\mathbf{Q} = -k_0 \mathbf{C}^{-1} \boldsymbol{\gamma} = -\frac{k_0}{C} \mathbf{G} \boldsymbol{\gamma}, \quad (27)$$

where $k_0 \in \mathbb{R}^+$ denotes the coefficient of thermal conductivity with respect to the reference configuration.

Remark 2. The proposed constitutive model (21) within Ex. 1 can be considered as polyconvex only up to a certain temperature θ_{cr} . More precisely, $\tilde{\mathcal{F}}$ must satisfy the conditions

$$\begin{bmatrix} \delta \mathbf{F} \\ \delta \mathbf{H} \\ \delta J \\ \delta \mathbf{D}_0 \\ \delta \mathbf{d} \end{bmatrix} : \underbrace{\begin{bmatrix} \partial_{\mathbf{FF}}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{FH}}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{FJ}}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{FD}_0}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{Fd}}^2 \tilde{\mathcal{F}} \\ \partial_{\mathbf{HF}}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{HH}}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{HJ}}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{HD}_0}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{Hd}}^2 \tilde{\mathcal{F}} \\ \partial_{\mathbf{JF}}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{JH}}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{JJ}}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{JD}_0}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{Jd}}^2 \tilde{\mathcal{F}} \\ \partial_{\mathbf{D}_0 \mathbf{F}}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{D}_0 \mathbf{H}}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{D}_0 \mathbf{J}}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{D}_0 \mathbf{D}_0}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{D}_0 \mathbf{d}}^2 \tilde{\mathcal{F}} \\ \partial_{\mathbf{dF}}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{dH}}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{dJ}}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{dD}_0}^2 \tilde{\mathcal{F}} & \partial_{\mathbf{dd}}^2 \tilde{\mathcal{F}} \end{bmatrix}}_{[\mathbb{H}_{\tilde{\mathcal{F}}}]}} : \begin{bmatrix} \delta \mathbf{F} \\ \delta \mathbf{H} \\ \delta J \\ \delta \mathbf{D}_0 \\ \delta \mathbf{d} \end{bmatrix} \geq 0, \quad \partial_{\theta \theta}^2 \tilde{\mathcal{F}} < 0, \quad (28)$$

³ The polyconvexity properties of (23) are discussed in more detail in Appx. A [Bon+21].

for this to be true. However, as can be seen in [Fra+22a], the critical temperature is typically relatively high, so we will not address this topic further.

Remark 3. Mehnert et al. [MHS18] considered a similar additive decomposition to that in equation (21) within Ex. 1, where the main difference resided in the higher nonlinearity associated with the temperature dependent factor $f_\theta(\theta)$, defined therein as

$$f_\theta(\theta) = \frac{\theta}{\theta_R} + g(\theta), \quad g(\theta) = -\frac{\theta \left(\tanh(a_2(\theta - \theta_R)) \right)^3}{\theta_R + a_1}, \quad (29)$$

where $a_1, a_2 \in \mathbb{R}$ are material parameters. Such nonlinearity was introduced with a two-fold purpose. First, to introduce a dependence of the specific heat capacity with respect to deformations. This can be seen from the definition of the specific heat capacity, i.e.,

$$\bar{k}(\mathbf{C}, \mathbf{G}, C, \mathbf{D}_0, \theta) = -\theta \partial_{\theta\theta}^2 \mathcal{F} = \kappa - \theta g''(\theta) \mathcal{F}_{\text{em}}(\mathbf{C}, \mathbf{G}, C, \mathbf{D}_0). \quad (30)$$

Second, a definition of $f_\theta(\theta)$ as in (29) ensures a nonlinear dependence of both stresses and electric fields with respect to temperature, which, according to equation (8), would depend on a linear fashion with respect to $f_\theta(\theta)$, comprising the linear term θ/θ_R and the nonlinear term $g(\theta)$.

3.2 Mixed formulation for non-potential coupled systems

In order to develop a multi-field, mixed formulation for non-potential systems, we carry out two steps. First and foremost, we start with a variational Hu-Washizu type formulation for elastostatics (cf. [BJH18]) and convert it to its associated (mixed) strong form. In a second step, we augment the (mixed) strong form to a mixed thermo-electro-mechanics strong formulation.

A noteworthy feature of the above procedure is that it is not restricted to thermo-electro-mechanical coupled problems but does also work for various coupled systems including non-potential contributions.

3.2.1 Variational Hu-Washizu type formulation for elastostatics

For the elastostatic case under consideration, the potential energy can be defined as

$$\Pi^{\text{m}}(\boldsymbol{\varphi}) = \Pi^{\text{m,int}}(\boldsymbol{\varphi}) + \Pi^{\text{m,ext}}(\boldsymbol{\varphi}), \quad (31)$$

with its internal and external contributions

$$\Pi^{\text{m,int}}(\boldsymbol{\varphi}) = \int_{\mathcal{B}_0} \widehat{W}(\mathbf{F}(\boldsymbol{\varphi})) \, dV, \quad \Pi^{\text{m,ext}}(\boldsymbol{\varphi}) = - \int_{\mathcal{B}_0} \bar{\mathbf{B}} \cdot \boldsymbol{\varphi} \, dV - \int_{\partial_T \mathcal{B}_0} \bar{\mathbf{T}} \cdot \boldsymbol{\varphi} \, dA, \quad (32)$$

respectively, where $\widehat{W} : \mathbb{R}^{3 \times 3} \rightarrow \mathbb{R}$ denotes the strain energy. In the above, the solution function $\boldsymbol{\varphi} \in \mathbb{V}_\varphi$ is employed with space

$$\mathbb{V}_\varphi = \{ \boldsymbol{\varphi} : \mathcal{B}_0 \rightarrow \mathbb{R}^3 \mid \varphi_i \in H^1(\mathcal{B}_0) \wedge \boldsymbol{\varphi} = \bar{\boldsymbol{\varphi}} \text{ on } \partial_\varphi \mathcal{B}_0 \wedge \det(\nabla_{\mathbf{X}} \boldsymbol{\varphi}) > 0 \text{ in } \mathcal{B}_0 \}, \quad (33)$$

where H^1 denotes the Sobolev space. The principle of stationary potential energy states that the first variation of the potential energy disappears if equilibrium prevails (cf. [Hol00]). The principle of stationary potential energy is equivalent to the procedure of deriving the weak form

directly from the strong formulation of a problem. By introducing the objective kinematic set within a cascade manner⁴ as

$$\begin{aligned}\mathbf{C} &= (\nabla_{\mathbf{x}} \boldsymbol{\varphi})^T \nabla_{\mathbf{x}} \boldsymbol{\varphi}, \\ \mathbf{G} &= \frac{1}{2} \mathbf{C} \otimes \mathbf{C}, \\ C &= \frac{1}{3} \mathbf{G} : \mathbf{C},\end{aligned}\tag{34}$$

the potential energy can be re-expressed as an augmented 7-field Hu-Washizu type version

$$\begin{aligned}\tilde{\Pi}^m(\boldsymbol{\varphi}, \boldsymbol{\Sigma}, \boldsymbol{\Lambda}) &= \int_{\mathcal{B}_0} \mathbb{W}(\mathbf{C}, \mathbf{G}, C) + \boldsymbol{\Lambda}^{\mathbf{C}} : ((\nabla_{\mathbf{x}} \boldsymbol{\varphi})^T \nabla_{\mathbf{x}} \boldsymbol{\varphi} - \mathbf{C}) \\ &\quad + \boldsymbol{\Lambda}^{\mathbf{G}} : \left(\frac{1}{2} \mathbf{C} \otimes \mathbf{C} - \mathbf{G} \right) \\ &\quad + \Lambda^C : \left(\frac{1}{3} \mathbf{G} : \mathbf{C} - C \right) \, dV + \Pi^{\text{m,ext}}(\boldsymbol{\varphi}),\end{aligned}\tag{35}$$

where the above kinematic set is enforced (cf. [BJH18]). Therein, the kinematic set $\boldsymbol{\Sigma} = (\mathbf{C}, \mathbf{G}, C)$ and the set of Lagrange multipliers $\boldsymbol{\Lambda} = (\boldsymbol{\Lambda}^{\mathbf{C}}, \boldsymbol{\Lambda}^{\mathbf{G}}, \Lambda^C)$ have been introduced to simplify notation. Furthermore, the solution functions $\mathbf{C}, \mathbf{G}, \boldsymbol{\Lambda}^{\mathbf{C}}, \boldsymbol{\Lambda}^{\mathbf{G}} \in \mathbb{V}_{\mathbf{A}}$, with generalized space

$$\mathbb{V}_{\mathbf{A}} = \mathbb{V}_{\mathbf{A}}^0 = \{ \mathbf{A} : \mathcal{B}_0 \rightarrow \mathbb{S} \mid A_{ij} \in \mathbb{L}_2(\mathcal{B}_0) \},\tag{36}$$

and $C, \Lambda^C \in \mathbb{V}_A$, with generalized space

$$\mathbb{V}_A = \mathbb{V}_A^0 = \{ A : \mathcal{B}_0 \rightarrow \mathbb{R} \mid A \in \mathbb{L}_2(\mathcal{B}_0) \},\tag{37}$$

are used, where \mathbb{S} denotes the space of symmetric second-order tensors and \mathbb{L}_2 is the space of square integrable functions. Imposing stationarity conditions to (35), i.e., variation with respect to the independent variables and setting the variation to zero yields the mixed variational formulation for elastostatics

$$\begin{aligned}\delta_{\boldsymbol{\varphi}} \tilde{\Pi}^m &= \int_{\mathcal{B}_0} \boldsymbol{\Lambda}^{\mathbf{C}} : ((\nabla_{\mathbf{x}} \delta \boldsymbol{\varphi})^T \nabla_{\mathbf{x}} \boldsymbol{\varphi} + (\nabla_{\mathbf{x}} \boldsymbol{\varphi})^T \nabla_{\mathbf{x}} \delta \boldsymbol{\varphi}) \, dV + \Pi^{\text{m,ext}}(\delta \boldsymbol{\varphi}) = 0, \\ \delta_{\mathbf{C}} \tilde{\Pi}^m &= \int_{\mathcal{B}_0} \delta \mathbf{C} : \left(\partial_{\mathbf{C}} \mathbb{W} - \boldsymbol{\Lambda}^{\mathbf{C}} + \boldsymbol{\Lambda}^{\mathbf{G}} \otimes \mathbf{C} + \frac{1}{3} \Lambda^C \mathbf{G} \right) \, dV = 0, \\ \delta_{\mathbf{G}} \tilde{\Pi}^m &= \int_{\mathcal{B}_0} \delta \mathbf{G} : \left(\partial_{\mathbf{G}} \mathbb{W} - \boldsymbol{\Lambda}^{\mathbf{G}} + \frac{1}{3} \Lambda^C \mathbf{C} \right) \, dV = 0, \\ \delta_C \tilde{\Pi}^m &= \int_{\mathcal{B}_0} \delta C \left(\partial_C \mathbb{W} - \Lambda^C \right) \, dV = 0, \\ \delta_{\boldsymbol{\Lambda}^{\mathbf{C}}} \tilde{\Pi}^m &= \int_{\mathcal{B}_0} \delta \boldsymbol{\Lambda}^{\mathbf{C}} : ((\nabla_{\mathbf{x}} \boldsymbol{\varphi})^T \nabla_{\mathbf{x}} \boldsymbol{\varphi} - \mathbf{C}) \, dV = 0, \\ \delta_{\boldsymbol{\Lambda}^{\mathbf{G}}} \tilde{\Pi}^m &= \int_{\mathcal{B}_0} \delta \boldsymbol{\Lambda}^{\mathbf{G}} : \left(\frac{1}{2} \mathbf{C} \otimes \mathbf{C} - \mathbf{G} \right) \, dV = 0, \\ \delta_{\Lambda^C} \tilde{\Pi}^m &= \int_{\mathcal{B}_0} \delta \Lambda^C \left(\frac{1}{3} \mathbf{G} : \mathbf{C} - C \right) \, dV = 0,\end{aligned}\tag{38}$$

where the equations above have to hold for arbitrary $\delta \boldsymbol{\varphi} \in \mathbb{V}_{\boldsymbol{\varphi}}^0$, with

$$\mathbb{V}_{\boldsymbol{\varphi}}^0 = \{ \mathbf{w}_{\boldsymbol{\varphi}} : \mathcal{B}_0 \rightarrow \mathbb{R}^3 \mid w_{\varphi_i} \in H^1(\mathcal{B}_0) \wedge \mathbf{w}_{\boldsymbol{\varphi}} = \mathbf{0} \text{ on } \partial_{\boldsymbol{\varphi}} \mathcal{B}_0 \},\tag{39}$$

⁴ \mathbf{G} is bounded to independent variable \mathbf{C} instead of $\mathbf{C}(\boldsymbol{\varphi}) = (\nabla_{\mathbf{x}} \boldsymbol{\varphi})^T \nabla_{\mathbf{x}} \boldsymbol{\varphi}$. The same applies for the independent variable C which is bounded to the independent variables \mathbf{G} and \mathbf{C} , respectively instead of $\mathbf{G}(\mathbf{C}(\boldsymbol{\varphi}))$ and $\mathbf{C}(\boldsymbol{\varphi})$.

$\delta\mathbf{C}$, $\delta\mathbf{G}$, $\delta\mathbf{\Lambda}^C$, $\delta\mathbf{\Lambda}^G \in \mathbb{V}_{\mathbf{A}}^0$, and δC , $\delta\Lambda^C \in \mathbb{V}_A^0$. The variational formulation (38) can be converted to its strong form using basic algebraic operations. This strong form consists of the equations

$$\left. \begin{aligned} \text{Div}(2\mathbf{F}\mathbf{\Lambda}^C) + \bar{\mathbf{B}} &= \mathbf{0} \\ \partial_{\mathbf{C}}\mathcal{W} - \mathbf{\Lambda}^C + \mathbf{\Lambda}^G \otimes \mathbf{C} + \frac{1}{3}\Lambda^C \mathbf{G} &= \mathbf{0} \\ \partial_{\mathbf{G}}\mathcal{W} - \mathbf{\Lambda}^G + \frac{1}{3}\Lambda^C \mathbf{C} &= \mathbf{0} \\ \partial_C\mathcal{W} - \Lambda^C &= 0 \\ (\nabla_{\mathbf{X}}\varphi)^T \nabla_{\mathbf{X}}\varphi - \mathbf{C} &= \mathbf{0} \\ \frac{1}{2}\mathbf{C} \otimes \mathbf{C} - \mathbf{G} &= \mathbf{0} \\ \frac{1}{3}\mathbf{G} : \mathbf{C} - C &= 0 \end{aligned} \right\} \text{in } \mathcal{B}_0 \quad (40)$$

and the corresponding boundary conditions

$$\begin{aligned} \varphi &= \bar{\varphi} \quad \text{on } \partial_{\varphi}\mathcal{B}_0, \\ (2\mathbf{F}\mathbf{\Lambda}^C)\mathbf{N} &= \bar{\mathbf{T}} \quad \text{on } \partial_T\mathcal{B}_0. \end{aligned} \quad (41)$$

3.2.2 Mixed thermo-electro-mechanical strong formulation

To extend the BVP in (40)-(41) to the case of thermo-electro-elastodynamics, we proceed as follows. First, we take into account the inertia term within the balance of linear momentum, i.e., in equation (40)₁. Second, we consider the IBVP of thermodynamics (4) and the BVP of electrostatics (6) to incorporate thermal and electrical effects. Finally, we employ the energy density function $\mathcal{F} = \mathcal{F}(\mathbf{C}, \mathbf{G}, C, \mathbf{D}_0, \theta)$ from (21) to achieve coupling between the different physical processes. The above steps yield the final multiphysics, mixed IBVP⁵ consisting of the equations

$$\left. \begin{aligned} \rho_0(\dot{\varphi} - \mathbf{v}) &= \mathbf{0} \\ \text{Div}(2\mathbf{F}\mathbf{\Lambda}^C) + \bar{\mathbf{B}} &= \rho_0 \dot{\mathbf{v}} \\ \theta \dot{\eta} + \text{Div} \mathbf{Q} - \bar{R} &= 0 \\ \text{Div} \mathbf{D}_0 - \bar{\rho}_0^e &= 0 \\ \partial_{\mathbf{D}_0}\mathcal{F} + \nabla_{\mathbf{X}}\Phi &= \mathbf{0} \\ \partial_{\mathbf{C}}\mathcal{F} - \mathbf{\Lambda}^C + \mathbf{\Lambda}^G \otimes \mathbf{C} + \frac{1}{3}\Lambda^C \mathbf{G} &= \mathbf{0} \\ \partial_{\mathbf{G}}\mathcal{F} - \mathbf{\Lambda}^G + \frac{1}{3}\Lambda^C \mathbf{C} &= \mathbf{0} \\ \partial_C\mathcal{F} - \Lambda^C &= 0 \\ (\nabla_{\mathbf{X}}\varphi)^T \nabla_{\mathbf{X}}\varphi - \mathbf{C} &= \mathbf{0} \\ \frac{1}{2}\mathbf{C} \otimes \mathbf{C} - \mathbf{G} &= \mathbf{0} \\ \frac{1}{3}\mathbf{G} : \mathbf{C} - C &= 0 \end{aligned} \right\} \text{in } \mathcal{B}_0 \times \mathcal{I}, \quad (42)$$

⁵ By additionally enforcing constraint (6)₂ directly, we also yield a mixed formulation with regard to the electric part, which is known as ‘hybrid finite-element model’ (see [GH97]) and is commonly applied in electrostatics due to some advantages (cf. [Fra+19; Fra+22a; Sch+12]).

the boundary conditions

$$\begin{aligned}
\varphi &= \bar{\varphi} && \text{on } \partial_\varphi \mathcal{B}_0 \times \mathcal{I}, \\
(2 \mathbf{F} \boldsymbol{\Lambda}^C) \mathbf{N} &= \bar{\mathbf{T}} && \text{on } \partial_T \mathcal{B}_0 \times \mathcal{I}, \\
\theta &= \bar{\theta} && \text{on } \partial_\theta \mathcal{B}_0 \times \mathcal{I}, \\
\mathbf{Q} \cdot \mathbf{N} &= -\bar{Q} && \text{on } \partial_Q \mathcal{B}_0 \times \mathcal{I}, \\
\mathbf{D}_0 \cdot \mathbf{N} &= -\bar{\omega}_0^e && \text{on } \partial_\omega \mathcal{B}_0 \times \mathcal{I}, \\
\Phi &= \bar{\Phi} && \text{on } \partial_\Phi \mathcal{B}_0 \times \mathcal{I},
\end{aligned} \tag{43}$$

and the initial conditions

$$\left. \begin{aligned}
\varphi(t=0) &= \varphi_0 \\
\mathbf{v}(t=0) &= \mathbf{v}_0 \\
\theta(t=0) &= \theta_0
\end{aligned} \right\} \text{in } \mathcal{B}_0. \tag{44}$$

3.3 Energy formulation to facilitate discrete energy consistency

In order to facilitate the design of an energy-momentum consistent time integration scheme, the local energy balance on a continuum level in $(42)_3$ is reconsidered as

$$\frac{d}{dt} (\theta \eta) - \dot{\theta} \eta + \text{Div } \mathbf{Q} - \bar{R} = 0 \quad \text{in } \mathcal{B}_0 \times \mathcal{I}, \tag{45}$$

which was already proposed in [Ort+18] and applied in the context of thermo-electro-mechanics in [Fra+22a].

4 Weak formulation

Based on the strong formulation given in (42) , but exchanging the local energy balance in $(42)_3$ with (45) , the associated symmetric weak formulation of (42) is obtained after multiplying each equation with a suitable test function, integrating over the domain \mathcal{B}_0 , and applying basic alge-

braic operations. This yields

$$\begin{aligned}
& \int_{\mathcal{B}_0} \mathbf{w}_v \cdot (\dot{\boldsymbol{\varphi}} - \mathbf{v}) \rho_0 \, dV = 0, \\
& \int_{\mathcal{B}_0} \left(\mathbf{w}_\varphi \cdot \dot{\mathbf{v}} \rho_0 + \boldsymbol{\Lambda}^C : \left((\nabla_{\mathbf{X}} \mathbf{w}_\varphi)^T \nabla_{\mathbf{X}} \boldsymbol{\varphi} + (\nabla_{\mathbf{X}} \boldsymbol{\varphi})^T \nabla_{\mathbf{X}} \mathbf{w}_\varphi \right) \right) \, dV + \Pi^{\text{m,ext}}(\mathbf{w}_\varphi) = 0, \\
& \int_{\mathcal{B}_0} \left(w_\theta \left(\frac{d}{dt}(\theta\eta) - \dot{\theta}\eta \right) - \nabla_{\mathbf{X}} w_\theta \cdot \mathbf{Q} \right) \, dV + \Pi^{\text{t,ext}}(w_\theta) = 0, \\
& \int_{\mathcal{B}_0} \nabla_{\mathbf{X}} w_\Phi \cdot \mathbf{D}_0 \, dV + \Pi^{\text{e,ext}}(w_\Phi) = 0, \\
& \int_{\mathcal{B}_0} \mathbf{w}_{\mathbf{D}_0} \cdot (\partial_{\mathbf{D}_0} \mathcal{F} + \nabla_{\mathbf{X}} \Phi) \, dV = 0, \\
& \int_{\mathcal{B}_0} \mathbf{w}_{\mathbf{C}} : \left(\partial_{\mathbf{C}} \mathcal{F} - \boldsymbol{\Lambda}^C + \boldsymbol{\Lambda}^G \otimes \mathbf{C} + \frac{1}{3} \boldsymbol{\Lambda}^C \mathbf{G} \right) \, dV = 0, \\
& \int_{\mathcal{B}_0} \mathbf{w}_{\mathbf{G}} : \left(\partial_{\mathbf{G}} \mathcal{F} - \boldsymbol{\Lambda}^G + \frac{1}{3} \boldsymbol{\Lambda}^C \mathbf{C} \right) \, dV = 0, \\
& \int_{\mathcal{B}_0} w_C (\partial_{\mathbf{C}} \mathcal{F} - \boldsymbol{\Lambda}^C) \, dV = 0, \\
& \int_{\mathcal{B}_0} \mathbf{w}_{\boldsymbol{\Lambda}^C} : \left(\nabla_{\mathbf{X}} \boldsymbol{\varphi} \right)^T \nabla_{\mathbf{X}} \boldsymbol{\varphi} - \mathbf{C} \, dV = 0, \\
& \int_{\mathcal{B}_0} \mathbf{w}_{\boldsymbol{\Lambda}^G} : \left(\frac{1}{2} \mathbf{C} \otimes \mathbf{C} - \mathbf{G} \right) \, dV = 0, \\
& \int_{\mathcal{B}_0} w_{\boldsymbol{\Lambda}^C} \left(\frac{1}{3} \mathbf{G} : \mathbf{C} - C \right) \, dV = 0,
\end{aligned} \tag{46}$$

where the external thermal and electrical potentials are given by

$$\begin{aligned}
\Pi^{\text{t,ext}}(w_\theta) &= - \int_{\mathcal{B}_0} w_\theta \bar{R} \, dV - \int_{\partial_Q \mathcal{B}_0} w_\theta \bar{Q} \, dA, \\
\Pi^{\text{e,ext}}(w_\Phi) &= \int_{\mathcal{B}_0} w_\Phi \bar{\rho}_0^e \, dV + \int_{\partial_\omega \mathcal{B}_0} w_\Phi \bar{\omega}_0^e \, dA,
\end{aligned} \tag{47}$$

respectively. The above weak equations are valid for suitable test functions, i.e., $\mathbf{w}_v \in \mathbb{V}_v^0$, $\mathbf{w}_\varphi \in \mathbb{V}_\varphi^0$, $w_\theta \in \mathbb{V}_\theta^0$, $w_\Phi \in \mathbb{V}_\Phi^0$, $\mathbf{w}_{\mathbf{D}_0} \in \mathbb{V}_{\mathbf{D}_0}^0$, $\mathbf{w}_{\mathbf{C}}$, $\mathbf{w}_{\mathbf{G}}$, $\mathbf{w}_{\boldsymbol{\Lambda}^C}$, $\mathbf{w}_{\boldsymbol{\Lambda}^G} \in \mathbb{V}_{\mathbf{A}}^0$, and w_C , $w_{\boldsymbol{\Lambda}^C} \in \mathbb{V}_A^0$, with

$$\begin{aligned}
\mathbb{V}_v &= \mathbb{V}_v^0 = \{ \mathbf{v} : \mathcal{B}_0 \rightarrow \mathbb{R}^3 \mid v_i \in \mathbb{L}_2(\mathcal{B}_0) \}, \\
\mathbb{V}_\theta^0 &= \{ w_\theta : \mathcal{B}_0 \rightarrow \mathbb{R} \mid w_\theta \in H^1(\mathcal{B}_0) \wedge w_\theta = 0 \text{ on } \partial_\theta \mathcal{B}_0 \}, \\
\mathbb{V}_\Phi^0 &= \{ w_\Phi : \mathcal{B}_0 \rightarrow \mathbb{R} \mid w_\Phi \in H^1(\mathcal{B}_0) \wedge w_\Phi = 0 \text{ on } \partial_\Phi \mathcal{B}_0 \}, \\
\mathbb{V}_{\mathbf{D}_0} &= \mathbb{V}_{\mathbf{D}_0}^0 = \{ \mathbf{D}_0 : \mathcal{B}_0 \rightarrow \mathbb{R}^3 \mid \mathbf{D}_{0i} \in \mathbb{L}_2(\mathcal{B}_0) \}.
\end{aligned} \tag{48}$$

Moreover, $\mathbf{v} \in \mathbb{V}_v$, $\boldsymbol{\varphi} \in \mathbb{V}_\varphi$, $\theta \in \mathbb{V}_\theta$, $\Phi \in \mathbb{V}_\Phi$, $\mathbf{D}_0 \in \mathbb{V}_{\mathbf{D}_0}$, \mathbf{C} , \mathbf{G} , $\boldsymbol{\Lambda}^C$, $\boldsymbol{\Lambda}^G \in \mathbb{V}_{\mathbf{A}}$, and C , $\boldsymbol{\Lambda}^C \in \mathbb{V}_A$ must hold for the solution functions, with the remaining function spaces defined by

$$\begin{aligned}
\mathbb{V}_\theta &= \{ \theta : \mathcal{B}_0 \rightarrow \mathbb{R} \mid \theta \in H^1(\mathcal{B}_0) \wedge \theta = \bar{\theta} \text{ on } \partial_\theta \mathcal{B}_0 \}, \\
\mathbb{V}_\Phi &= \{ \Phi : \mathcal{B}_0 \rightarrow \mathbb{R} \mid \Phi \in H^1(\mathcal{B}_0) \wedge \Phi = \bar{\Phi} \text{ on } \partial_\Phi \mathcal{B}_0 \}.
\end{aligned} \tag{49}$$

4.1 Balance laws

In this section, the balance laws of the coupled problem given by (46) are examined. In particular, total angular momentum and total energy are considered. To this end, a homogeneous Neumann problem is assumed by applying $\partial_\varphi \mathcal{B}_0 = \partial_\theta \mathcal{B}_0 = \partial_\Phi \mathcal{B}_0 = \emptyset$.

4.1.1 Conservation of angular momentum

The total angular momentum of the continuum body with respect to the origin of the inertial frame is given by

$$\mathbf{J} = \int_{\mathcal{B}_0} \boldsymbol{\varphi} \times \rho_0 \mathbf{v} \, dV. \quad (50)$$

To verify conservation of angular momentum, we take the following admissible values for the test functions $\mathbf{w}_v = \boldsymbol{\zeta} \times \dot{\boldsymbol{\varphi}} \in \mathbb{V}_v^0$ and $\mathbf{w}_\varphi = \boldsymbol{\zeta} \times \boldsymbol{\varphi} \in \mathbb{V}_\varphi^0$ in (46) using arbitrary but constant values for $\boldsymbol{\zeta} \in \mathbb{R}^3$. With the above, (46)₁ yields

$$\int_{\mathcal{B}_0} \dot{\boldsymbol{\varphi}} \times \rho_0 \mathbf{v} \, dV = \mathbf{0}. \quad (51)$$

Accordingly, the conservation of total angular momentum can be written as

$$\dot{\mathbf{J}} = \int_{\mathcal{B}_0} \boldsymbol{\varphi} \times \rho_0 \dot{\mathbf{v}} \, dV = \mathbf{0}. \quad (52)$$

Furthermore, we introduce the skew-symmetric matrix $\hat{\boldsymbol{\zeta}} \in \mathbb{R}^{3 \times 3}$ by $\boldsymbol{\zeta} \times \mathbf{a} = \hat{\boldsymbol{\zeta}} \mathbf{a}$ with property $\hat{\boldsymbol{\zeta}}^T + \hat{\boldsymbol{\zeta}} = \mathbf{0}$, such that (46)₂ with (52) can be written as

$$\boldsymbol{\zeta} \cdot (\dot{\mathbf{J}} - \mathbf{M}^{\text{m,ext}}) = 0. \quad (53)$$

In the above the total external mechanical torque exerted by body and surface loads is introduced as

$$\mathbf{M}^{\text{m,ext}} = \int_{\mathcal{B}_0} \boldsymbol{\varphi} \times \bar{\mathbf{B}} \, dV + \int_{\partial_T \mathcal{B}_0} \boldsymbol{\varphi} \times \bar{\mathbf{T}} \, dA. \quad (54)$$

Hence, for vanishing external mechanical loads, the total angular momentum is conserved.

4.1.2 Conservation of energy

The total energy of the thermo-electro-mechanical body

$$E = T + U, \quad (55)$$

consists of the total kinetic energy

$$T = \frac{1}{2} \int_{\mathcal{B}_0} \rho_0 \mathbf{v} \cdot \mathbf{v} \, dV, \quad (56)$$

and (cf. [Fra+22a])

$$U = \int_{\mathcal{B}_0} \mathcal{F}(\mathbf{C}, \mathbf{G}, C, \mathbf{D}_0, \theta) + \mathbf{D}_0 \cdot \nabla_{\mathbf{X}} \Phi + \theta \eta \, dV. \quad (57)$$

Accordingly, conservation of total energy is achieved if

$$\dot{E} = \dot{T} + \dot{U} = 0. \quad (58)$$

Therein, the derivatives of the energies with respect to time can be written as

$$\begin{aligned} \dot{T} &= \int_{\mathcal{B}_0} \rho_0 \mathbf{v} \cdot \dot{\mathbf{v}} \, dV, \\ \dot{U} &= \int_{\mathcal{B}_0} \left(\partial_{\mathbf{C}} \mathcal{F} : \dot{\mathbf{C}} + \partial_{\mathbf{G}} \mathcal{F} : \dot{\mathbf{G}} + \partial_C \mathcal{F} \dot{C} + \partial_{\mathbf{D}_0} \mathcal{F} \cdot \dot{\mathbf{D}}_0 + \partial_\theta \mathcal{F} \dot{\theta} \right) \, dV \\ &\quad + \int_{\mathcal{B}_0} \left(\dot{\mathbf{D}}_0 \cdot \nabla_{\mathbf{X}} \Phi + \mathbf{D}_0 \cdot \nabla_{\mathbf{X}} \dot{\Phi} + \dot{\theta} \eta + \theta \dot{\eta} \right) \, dV \\ &= \int_{\mathcal{B}_0} \left(\partial_{\mathbf{C}} \mathcal{F} : \dot{\mathbf{C}} + \partial_{\mathbf{G}} \mathcal{F} : \dot{\mathbf{G}} + \partial_C \mathcal{F} \dot{C} \right) \, dV \\ &\quad + \int_{\mathcal{B}_0} \left((\partial_{\mathbf{D}_0} \mathcal{F} + \nabla_{\mathbf{X}} \Phi) \cdot \dot{\mathbf{D}}_0 + \mathbf{D}_0 \cdot \nabla_{\mathbf{X}} \dot{\Phi} + \theta \dot{\eta} \right) \, dV. \end{aligned} \quad (59)$$

In order to verify the conservation of total energy, we replace the test functions $(\mathbf{w}_v, \mathbf{w}_\varphi, w_\theta, w_\Phi, \mathbf{w}_{D_0})$ in (46) with $(\dot{\mathbf{v}}, \dot{\boldsymbol{\varphi}}, 1, \dot{\Phi}, \dot{\mathbf{D}}_0) \in \mathbb{V}_v^0 \times \mathbb{V}_\varphi^0 \times \mathbb{V}_\theta^0 \times \mathbb{V}_\Phi^0 \times \mathbb{V}_{D_0}^0$ and obtain

$$\begin{aligned} \int_{\mathcal{B}_0} \dot{\mathbf{v}} \cdot (\dot{\boldsymbol{\varphi}} - \mathbf{v}) \rho_0 \, dV &= 0, \\ \int_{\mathcal{B}_0} \left(\dot{\boldsymbol{\varphi}} \cdot \rho_0 \dot{\mathbf{v}} + \boldsymbol{\Lambda}^C : \left((\nabla_{\mathbf{X}} \dot{\boldsymbol{\varphi}})^T \nabla_{\mathbf{X}} \boldsymbol{\varphi} + (\nabla_{\mathbf{X}} \boldsymbol{\varphi})^T \nabla_{\mathbf{X}} \dot{\boldsymbol{\varphi}} \right) \right) \, dV + \Pi^{\text{m,ext}}(\dot{\boldsymbol{\varphi}}) &= 0, \\ \int_{\mathcal{B}_0} \left(\frac{d}{dt} (\theta \eta) - \dot{\theta} \eta \right) \, dV + \Pi^{\text{t,ext}}(1) &= 0, \\ \int_{\mathcal{B}_0} \nabla_{\mathbf{X}} \dot{\Phi} \cdot \mathbf{D}_0 \, dV + \Pi^{\text{e,ext}}(\dot{\Phi}) &= 0, \\ \int_{\mathcal{B}_0} \dot{\mathbf{D}}_0 \cdot (\partial_{\mathbf{D}_0} \mathcal{F} + \nabla_{\mathbf{X}} \Phi) \, dV &= 0. \end{aligned} \quad (60)$$

Furthermore, we apply $(\mathbf{w}_C, \mathbf{w}_G, w_C) = (\dot{\mathbf{C}}, \dot{\mathbf{G}}, \dot{C}) \in \mathbb{V}_A^0 \times \mathbb{V}_A^0 \times \mathbb{V}_A^0$ in (46), which leads to

$$\begin{aligned} \int_{\mathcal{B}_0} \dot{\mathbf{C}} : \left(\partial_C \mathcal{F} - \boldsymbol{\Lambda}^C + \boldsymbol{\Lambda}^G \otimes \mathbf{C} + \frac{1}{3} \boldsymbol{\Lambda}^C \mathbf{G} \right) \, dV &= 0, \\ \int_{\mathcal{B}_0} \dot{\mathbf{G}} : \left(\partial_G \mathcal{F} - \boldsymbol{\Lambda}^G + \frac{1}{3} \boldsymbol{\Lambda}^C \mathbf{C} \right) \, dV &= 0, \\ \int_{\mathcal{B}_0} \dot{C} \left(\partial_C \mathcal{F} - \boldsymbol{\Lambda}^C \right) \, dV &= 0. \end{aligned} \quad (61)$$

Eventually, we use $(\mathbf{w}_{\Lambda^C}, \mathbf{w}_{\Lambda^G}, w_{\Lambda^C}) = (\boldsymbol{\Lambda}^C, \boldsymbol{\Lambda}^G, \Lambda^C) \in \mathbb{V}_A^0 \times \mathbb{V}_A^0 \times \mathbb{V}_A^0$ in (46), which yields

$$\begin{aligned} \int_{\mathcal{B}_0} \boldsymbol{\Lambda}^C : \left((\nabla_{\mathbf{X}} \dot{\boldsymbol{\varphi}})^T \nabla_{\mathbf{X}} \boldsymbol{\varphi} + (\nabla_{\mathbf{X}} \boldsymbol{\varphi})^T \nabla_{\mathbf{X}} \dot{\boldsymbol{\varphi}} - \dot{\mathbf{C}} \right) \, dV &= 0, \\ \int_{\mathcal{B}_0} \boldsymbol{\Lambda}^G : \left(\mathbf{C} \otimes \dot{\mathbf{C}} - \dot{\mathbf{G}} \right) \, dV &= 0, \\ \int_{\mathcal{B}_0} \Lambda^C \left(\frac{1}{3} \dot{\mathbf{G}} : \mathbf{C} + \frac{1}{3} \mathbf{G} : \dot{\mathbf{C}} - \dot{C} \right) \, dV &= 0. \end{aligned} \quad (62)$$

Finally, we add equations (60)₂₋₅ to (61)₁₋₃ and subtract (60)₁ and (62)₁₋₃, respectively, such that we obtain the desired result

$$\dot{T} + \dot{U} + \Pi^{\text{m,ext}}(\dot{\boldsymbol{\varphi}}) + \Pi^{\text{t,ext}}(1) + \Pi^{\text{e,ext}}(\dot{\Phi}) = 0. \quad (63)$$

Accordingly, for vanishing external loads, the total energy is a constant of the motion.

5 Time discretization: Energy-momentum scheme

In this section, we conduct the time discretization of the weak equations (46) derived in the previous section. For that, we divide the interval \mathcal{I} into subintervals $[t_n, t_{n+1}] \subset \mathcal{I}$. In doing so, we assume that the values of the fields $\boldsymbol{\varphi}$, \mathbf{v} , θ , Φ , \mathbf{D}_0 , $\boldsymbol{\Sigma}$, and $\boldsymbol{\Lambda}$ are known at time t_n and unknown at time t_{n+1} . For completeness, we denote the fields at time t_n by $(\bullet)_n$ and at time t_{n+1} by $(\bullet)_{n+1}$. Furthermore, we introduce the average value

$$(\bullet)_{n+\frac{1}{2}} = \frac{1}{2} [(\bullet)_n + (\bullet)_{n+1}], \quad (64)$$

and the time step size

$$\Delta t = t_{n+1} - t_n. \quad (65)$$

The objective is to develop a numerical one-step method that permits to compute the values of the unknown fields at time t_{n+1} . For this purpose, we choose the time discretization

$$\begin{aligned} & \int_{\mathcal{B}_0} \mathbf{w}_v \cdot \left(\frac{1}{\Delta t} (\boldsymbol{\varphi}_{n+1} - \boldsymbol{\varphi}_n) - \mathbf{v}_{n+\frac{1}{2}} \right) \rho_0 \, dV = 0, \\ & \int_{\mathcal{B}_0} \mathbf{w}_\varphi \cdot \frac{\rho_0}{\Delta t} (\mathbf{v}_{n+1} - \mathbf{v}_n) \\ & \quad + \boldsymbol{\Lambda}_{n+1}^{\mathbf{C}} : \left((\nabla_{\mathbf{X}} \mathbf{w}_\varphi)^{\mathbf{T}} \nabla_{\mathbf{X}} \boldsymbol{\varphi}_{n+\frac{1}{2}} + (\nabla_{\mathbf{X}} \boldsymbol{\varphi}_{n+\frac{1}{2}})^{\mathbf{T}} \nabla_{\mathbf{X}} \mathbf{w}_\varphi \right) \, dV + \Pi_{n+\frac{1}{2}}^{\text{m,ext}}(\mathbf{w}_\varphi) = 0, \\ & \int_{\mathcal{B}_0} w_\theta \left(\frac{1}{\Delta t} (\theta_{n+1} \eta_{n+1} + \theta_n \eta_n) - \frac{1}{\Delta t} (\theta_{n+1} - \theta_n) D_\theta \mathcal{F} \right) \, dV \\ & \quad - \int_{\mathcal{B}_0} \nabla_{\mathbf{X}} w_\theta \cdot \mathbf{Q}_{n+\frac{1}{2}} \, dV + \Pi_{n+\frac{1}{2}}^{\text{t,ext}}(w_\theta) = 0, \\ & \int_{\mathcal{B}_0} \nabla_{\mathbf{X}} w_\Phi \cdot \mathbf{D}_{0n+\frac{1}{2}} \, dV + \Pi_{n+\frac{1}{2}}^{\text{e,ext}}(w_\Phi) = 0, \\ & \int_{\mathcal{B}_0} \mathbf{w}_{\mathbf{D}_0} \cdot (\mathbf{D}_{\mathbf{D}_0} \mathcal{F} + \nabla_{\mathbf{X}} \Phi_{n+\frac{1}{2}}) \, dV = 0 \end{aligned} \quad (66)$$

for the weak equations (46)_{1–5}. In addition, we propose

$$\begin{aligned} & \int_{\mathcal{B}_0} \mathbf{w}_C : (\mathbf{D}_C \mathcal{F} - \boldsymbol{\Lambda}_{n+1}^{\mathbf{C}} + \boldsymbol{\Lambda}_{n+1}^{\mathbf{G}} \otimes \mathbf{C}_{n+\frac{1}{2}} + \frac{1}{3} \boldsymbol{\Lambda}_{n+1}^{\mathbf{C}} \mathbf{G}_{n+\frac{1}{2}}) \, dV = 0, \\ & \int_{\mathcal{B}_0} \mathbf{w}_G : (\mathbf{D}_G \mathcal{F} - \boldsymbol{\Lambda}_{n+1}^{\mathbf{G}} + \frac{1}{3} \boldsymbol{\Lambda}_{n+1}^{\mathbf{C}} \mathbf{C}_{n+\frac{1}{2}}) \, dV = 0, \\ & \int_{\mathcal{B}_0} w_C (\mathbf{D}_C \mathcal{F} - \boldsymbol{\Lambda}_{n+1}^{\mathbf{C}}) \, dV = 0 \end{aligned} \quad (67)$$

for the weak equations (46)_{6–8} and

$$\begin{aligned} & \int_{\mathcal{B}_0} \mathbf{w}_{\Lambda^C} : \left((\nabla_{\mathbf{X}} \boldsymbol{\varphi}_{n+1})^{\mathbf{T}} \nabla_{\mathbf{X}} \boldsymbol{\varphi}_{n+1} - \mathbf{C}_{n+1} \right) \, dV = 0, \\ & \int_{\mathcal{B}_0} \mathbf{w}_{\Lambda^G} : \left(\frac{1}{2} \mathbf{C}_{n+1} \otimes \mathbf{C}_{n+1} - \mathbf{G}_{n+1} \right) \, dV = 0, \\ & \int_{\mathcal{B}_0} w_{\Lambda^C} \left(\frac{1}{3} \mathbf{G}_{n+1} : \mathbf{C}_{n+1} - C_{n+1} \right) \, dV = 0 \end{aligned} \quad (68)$$

for the weak equations (46)_{9–11}.

In (66), the time-discrete versions of the external mechanical, thermal, and electrical contributions are given by

$$\begin{aligned} \Pi_{n+\frac{1}{2}}^{\text{m,ext}}(\mathbf{w}_\varphi) &= - \int_{\mathcal{B}_0} \bar{\mathbf{B}}_{n+\frac{1}{2}} \cdot \mathbf{w}_\varphi \, dV - \int_{\partial_T \mathcal{B}_0} \bar{\mathbf{T}}_{n+\frac{1}{2}} \cdot \mathbf{w}_\varphi \, dA, \\ \Pi_{n+\frac{1}{2}}^{\text{t,ext}}(w_\theta) &= - \int_{\mathcal{B}_0} \bar{R}_{n+\frac{1}{2}} w_\theta \, dV - \int_{\partial_Q \mathcal{B}_0} \bar{Q}_{n+\frac{1}{2}} w_\theta \, dA, \\ \Pi_{n+\frac{1}{2}}^{\text{e,ext}}(w_\Phi) &= \int_{\mathcal{B}_0} \bar{\rho}_{0n+\frac{1}{2}}^e w_\Phi \, dV + \int_{\partial_\omega \mathcal{B}_0} \bar{\omega}_{0n+\frac{1}{2}}^e w_\Phi \, dA. \end{aligned} \quad (69)$$

The proposed discretization in time conforms to an EM scheme. An essential part of this scheme is the utilization of the so-called discrete derivatives $\mathbf{D}_C \mathcal{F}$, $\mathbf{D}_G \mathcal{F}$, $\mathbf{D}_C \mathcal{F}$, $\mathbf{D}_{\mathbf{D}_0} \mathcal{F}$, and $\mathbf{D}_\theta \mathcal{F}$,

which were introduced in [Gon96] and can be interpreted as algorithmic or time-discrete counterparts of $\partial_{\mathbf{C}}\mathcal{F}$, $\partial_{\mathbf{G}}\mathcal{F}$, $\partial_C\mathcal{F}$, $\partial_{\mathbf{D}_0}\mathcal{F}$, and $\partial_\theta\mathcal{F}$. According to [Bet16], the concept of discrete derivatives is a further development of the original idea from [ST92], limited to St. Venant-Kirchhoff material. The five discrete derivatives can be defined, using the abbreviated notation $\mathcal{V} = (\mathcal{V}^1, \mathcal{V}^2, \mathcal{V}^3, \mathcal{V}^4, \mathcal{V}^5) = (\mathbf{C}, \mathbf{G}, C, \mathbf{D}_0, \theta)$, by

$$\begin{aligned} D_{\mathcal{V}^i}\mathcal{F} &= \frac{1}{2} (D_{\mathcal{V}^i}\mathcal{F}_{n+1,n} + D_{\mathcal{V}^i}\mathcal{F}_{n,n+1}), & i \in Y = \{1, 2, 3, 4, 5\}, \\ D_{\mathcal{V}^i}\mathcal{F}_{n+1,n} &= D_{\mathcal{V}^i}\mathcal{F}(\mathcal{V}_{n+1}^i, \mathcal{V}_n^i) \Big|_{\mathcal{V}_{n+1}^j, \mathcal{V}_n^k}, & \forall j \in Y : j < i; \forall k \in Y : k > i, \\ D_{\mathcal{V}^i}\mathcal{F}_{n,n+1} &= D_{\mathcal{V}^i}\mathcal{F}(\mathcal{V}_n^i, \mathcal{V}_{n+1}^i) \Big|_{\mathcal{V}_n^j, \mathcal{V}_{n+1}^k}, & \forall j \in Y : j < i; \forall k \in Y : k > i, \end{aligned} \quad (70)$$

where $D_{\mathcal{V}^i}\mathcal{F}(\mathcal{V}_{n+1}^i, \mathcal{V}_n^i) \Big|_{\mathcal{V}_{n+1}^j, \mathcal{V}_n^k}$ and $D_{\mathcal{V}^i}\mathcal{F}(\mathcal{V}_n^i, \mathcal{V}_{n+1}^i) \Big|_{\mathcal{V}_n^j, \mathcal{V}_{n+1}^k}$ are given by

$$\begin{aligned} D_{\mathcal{V}^i}\mathcal{F} \Big|_{\mathcal{V}_{n+1}^j, \mathcal{V}_n^k} &= \partial_{\mathcal{V}^i}\mathcal{F} \left(\mathcal{V}_{n+\frac{1}{2}}^i \right) \Big|_{\mathcal{V}_{n+1}^j, \mathcal{V}_n^k} \\ &+ \frac{\mathcal{F}(\mathcal{V}_{n+1}^i) \Big|_{\mathcal{V}_{n+1}^j, \mathcal{V}_n^k} - \mathcal{F}(\mathcal{V}_n^i) \Big|_{\mathcal{V}_{n+1}^j, \mathcal{V}_n^k} - \left\langle \partial_{\mathcal{V}^i}\mathcal{F} \left(\mathcal{V}_{n+\frac{1}{2}}^i \right) \Big|_{\mathcal{V}_{n+1}^j, \mathcal{V}_n^k}, \Delta\mathcal{V}^i \right\rangle}{\langle \Delta\mathcal{V}^i, \Delta\mathcal{V}^i \rangle} \Delta\mathcal{V}^i, \\ D_{\mathcal{V}^i}\mathcal{F} \Big|_{\mathcal{V}_n^j, \mathcal{V}_{n+1}^k} &= \partial_{\mathcal{V}^i}\mathcal{F} \left(\mathcal{V}_{n+\frac{1}{2}}^i \right) \Big|_{\mathcal{V}_n^j, \mathcal{V}_{n+1}^k} \\ &+ \frac{\mathcal{F}(\mathcal{V}_{n+1}^i) \Big|_{\mathcal{V}_n^j, \mathcal{V}_{n+1}^k} - \mathcal{F}(\mathcal{V}_n^i) \Big|_{\mathcal{V}_n^j, \mathcal{V}_{n+1}^k} - \left\langle \partial_{\mathcal{V}^i}\mathcal{F} \left(\mathcal{V}_{n+\frac{1}{2}}^i \right) \Big|_{\mathcal{V}_n^j, \mathcal{V}_{n+1}^k}, \Delta\mathcal{V}^i \right\rangle}{\langle \Delta\mathcal{V}^i, \Delta\mathcal{V}^i \rangle} \Delta\mathcal{V}^i. \end{aligned} \quad (71)$$

Therein, $\langle \bullet, \bullet \rangle$ denotes the inner product and $\Delta\mathcal{V}^i = \mathcal{V}_{n+1}^i - \mathcal{V}_n^i$.

Remark 4. If \mathcal{V}^i is a scalar quantity, the definition of the discrete derivatives is simplified. It is then reminiscent of Greenspan's formula (cf. [Gre84]) and becomes

$$\begin{aligned} D_{\mathcal{V}^i}\mathcal{F} \Big|_{\mathcal{V}_{n+1}^j, \mathcal{V}_n^k} &= \frac{\mathcal{F}(\mathcal{V}_{n+1}^i) \Big|_{\mathcal{V}_{n+1}^j, \mathcal{V}_n^k} - \mathcal{F}(\mathcal{V}_n^i) \Big|_{\mathcal{V}_{n+1}^j, \mathcal{V}_n^k}}{\Delta\mathcal{V}^i}, \\ D_{\mathcal{V}^i}\mathcal{F} \Big|_{\mathcal{V}_n^j, \mathcal{V}_{n+1}^k} &= \frac{\mathcal{F}(\mathcal{V}_{n+1}^i) \Big|_{\mathcal{V}_n^j, \mathcal{V}_{n+1}^k} - \mathcal{F}(\mathcal{V}_n^i) \Big|_{\mathcal{V}_n^j, \mathcal{V}_{n+1}^k}}{\Delta\mathcal{V}^i}. \end{aligned} \quad (72)$$

As shown in detail in [Fra+22a], the discrete derivatives possess two important properties:

1. Directionality:

This property is crucial to show the conservation of energy and states that

$$\begin{aligned} \mathcal{F}(\mathbf{V}_{n+1}) - \mathcal{F}(\mathbf{V}_n) &= D_{\mathbf{C}}\mathcal{F} : \Delta\mathbf{C} + D_{\mathbf{G}}\mathcal{F} : \Delta\mathbf{G} + D_C\mathcal{F} \Delta C \\ &+ D_{\mathbf{D}_0}\mathcal{F} \cdot \Delta\mathbf{D}_0 + D_\theta\mathcal{F} \Delta\theta. \end{aligned} \quad (73)$$

2. Consistency:

One can show that the discrete derivatives are well defined in the limit $\|\Delta\mathcal{V}^i\| \rightarrow 0$, where

$\|\Delta\mathcal{V}^i\| = \sqrt{\langle\Delta\mathcal{V}^i, \Delta\mathcal{V}^i\rangle}$, because

$$\begin{aligned} D_{\mathcal{V}^i}\mathcal{F} &= \partial_{\mathcal{V}^i}\mathcal{F}\left(\mathbf{v}_{n+\frac{1}{2}}\right) + \sum_{j=1}^5 O\left(\|\Delta\mathcal{V}^j\|^2\right) \\ &\quad + \sum_{k=1, k \neq i}^5 \sum_{l=k+1, l \neq i}^5 O\left(\|\Delta\mathcal{V}^k\| \|\Delta\mathcal{V}^l\|\right). \end{aligned} \quad (74)$$

Remark 5. Note that $D_{\mathcal{V}^i}\mathcal{F}$ is not defined for $\|\Delta\mathcal{V}^i\| = 0$. This case may occur, for example, during the first iteration of Newton's method. To overcome this potential numerical difficulty, it is reasonable to compute the discrete derivatives for $\|\Delta\mathcal{V}^i\| \rightarrow 0$ as for the midpoint rule, i.e.,

$$D_{\mathcal{V}^i}\mathcal{F} = \partial_{\mathcal{V}^i}\mathcal{F}\left(\mathbf{v}_{n+\frac{1}{2}}\right). \quad (75)$$

The validity of (75) follows from (74).

5.1 Semi-discrete balance laws

In this section, we show that the proposed time integration scheme in equations (66)-(68) satisfies the conservation laws for any time step size. As customary in doing so (cf. [Fra+18]), we assume the homogeneous Neumann case.

5.1.1 Conservation of angular momentum

The total angular momentum at time t_{n+1} and at time t_n is defined as

$$\mathbf{J}_{n+1} = \int_{\mathcal{B}_0} \boldsymbol{\varphi}_{n+1} \times \rho_0 \mathbf{v}_{n+1} \, dV, \quad \mathbf{J}_n = \int_{\mathcal{B}_0} \boldsymbol{\varphi}_n \times \rho_0 \mathbf{v}_n \, dV. \quad (76)$$

The total angular momentum is conserved if its variation from t_n to t_{n+1} vanishes, namely

$$\begin{aligned} \mathbf{J}_{n+1} - \mathbf{J}_n &= \int_{\mathcal{B}_0} \boldsymbol{\varphi}_{n+1} \times \rho_0 \mathbf{v}_{n+1} - \boldsymbol{\varphi}_n \times \rho_0 \mathbf{v}_n \, dV \\ &= \int_{\mathcal{B}_0} \left(\boldsymbol{\varphi}_{n+1} - \boldsymbol{\varphi}_n \right) \times \rho_0 \mathbf{v}_{n+\frac{1}{2}} + \boldsymbol{\varphi}_{n+\frac{1}{2}} \times \rho_0 (\mathbf{v}_{n+1} - \mathbf{v}_n) \, dV = \mathbf{0}. \end{aligned} \quad (77)$$

To show that the time-discrete version of the weak form satisfies this requirement, we assume that $\mathbf{w}_v = \boldsymbol{\zeta} \times \frac{1}{\Delta t} (\boldsymbol{\varphi}_{n+1} - \boldsymbol{\varphi}_n) \in \mathbb{V}_v^0$, where $\boldsymbol{\zeta} \in \mathbb{R}^3$ is arbitrary but constant. Inserting this value into (66)₁ results in

$$\boldsymbol{\zeta} \cdot \left(\int_{\mathcal{B}_0} \frac{1}{\Delta t} (\boldsymbol{\varphi}_{n+1} - \boldsymbol{\varphi}_n) \times \rho_0 \mathbf{v}_{n+\frac{1}{2}} \, dV \right) = 0. \quad (78)$$

By adding (78) to (66)₂ and assuming that $\mathbf{w}_\varphi = \boldsymbol{\zeta} \times \boldsymbol{\varphi}_{n+\frac{1}{2}} \in \mathbb{V}_\varphi^0$, we obtain

$$\begin{aligned} &\boldsymbol{\zeta} \cdot \left(\frac{1}{\Delta t} \int_{\mathcal{B}_0} (\boldsymbol{\varphi}_{n+1} - \boldsymbol{\varphi}_n) \times \rho_0 \mathbf{v}_{n+\frac{1}{2}} + \boldsymbol{\varphi}_{n+\frac{1}{2}} \times \rho_0 (\mathbf{v}_{n+1} - \mathbf{v}_n) \, dV \right) \\ &+ \int_{\mathcal{B}_0} \boldsymbol{\Lambda}_{n+1}^C : \left((\nabla_{\mathbf{x}} \boldsymbol{\varphi}_{n+\frac{1}{2}})^T (\hat{\boldsymbol{\zeta}}^T + \hat{\boldsymbol{\zeta}}) \nabla_{\mathbf{x}} \boldsymbol{\varphi}_{n+\frac{1}{2}} \right) \, dV - \boldsymbol{\zeta} \cdot \mathbf{M}_{n+\frac{1}{2}}^{\text{m,ext}} = 0, \end{aligned} \quad (79)$$

where $\hat{\boldsymbol{\zeta}}$ is again a skew-symmetric matrix and

$$\mathbf{M}_{n+\frac{1}{2}}^{\text{m,ext}} = \int_{\mathcal{B}_0} \boldsymbol{\varphi}_{n+\frac{1}{2}} \times \bar{\mathbf{B}}_{n+\frac{1}{2}} \, dV + \int_{\partial_T \mathcal{B}_0} \boldsymbol{\varphi}_{n+\frac{1}{2}} \times \bar{\mathbf{T}}_{n+\frac{1}{2}} \, dA. \quad (80)$$

Considering the properties of $\hat{\boldsymbol{\zeta}}$, we finally arrive at

$$\boldsymbol{\zeta} \cdot \left(\frac{1}{\Delta t} (\mathbf{J}_{n+1} - \mathbf{J}_n) - \mathbf{M}_{n+\frac{1}{2}}^{\text{m,ext}} \right) = 0. \quad (81)$$

Thus, as long as $\mathbf{M}_{n+\frac{1}{2}}^{\text{m,ext}} = \mathbf{0}$, e.g., when there are no external mechanical torques acting on the body, we can conclude that the proposed formulation conserves the total angular momentum.

5.1.2 Conservation of energy

The total energy at time steps t_{n+1} and t_n can be written as

$$E_{n+1} = T_{n+1} + U_{n+1}, \quad E_n = T_n + U_n, \quad (82)$$

with the corresponding kinetic energies

$$T_{n+1} = \frac{1}{2} \int_{\mathcal{B}_0} \rho_0 \mathbf{v}_{n+1} \cdot \mathbf{v}_{n+1} \, dV, \quad T_n = \frac{1}{2} \int_{\mathcal{B}_0} \rho_0 \mathbf{v}_n \cdot \mathbf{v}_n \, dV, \quad (83)$$

and

$$\begin{aligned} U_{n+1} &= \int_{\mathcal{B}_0} \mathcal{F}(\mathbf{C}_{n+1}, \mathbf{G}_{n+1}, C_{n+1}, \mathbf{D}_{0n+1}, \theta_{n+1}) + \mathbf{D}_{0n+1} \cdot \nabla_{\mathbf{X}} \Phi_{n+1} + \theta_{n+1} \eta_{n+1} \, dV, \\ U_n &= \int_{\mathcal{B}_0} \mathcal{F}(\mathbf{C}_n, \mathbf{G}_n, C_n, \mathbf{D}_{0n}, \theta_n) + \mathbf{D}_{0n} \cdot \nabla_{\mathbf{X}} \Phi_n + \theta_n \eta_n \, dV. \end{aligned} \quad (84)$$

The total energy is conserved from t_n to t_{n+1} if its variation vanishes, i.e.,

$$E_{n+1} - E_n = T_{n+1} - T_n + U_{n+1} - U_n = 0. \quad (85)$$

To show that the proposed time-discrete formulation conserves the total energy, we start by assuming that in equation (66)₁, $\mathbf{w}_{\mathbf{v}} = \mathbf{v}_{n+1} - \mathbf{v}_n \in \mathbb{V}_{\mathbf{v}}^0$, which yields

$$\begin{aligned} \int_{\mathcal{B}_0} (\mathbf{v}_{n+1} - \mathbf{v}_n) \cdot \frac{\rho_0}{\Delta t} (\boldsymbol{\varphi}_{n+1} - \boldsymbol{\varphi}_n) \, dV &= \int_{\mathcal{B}_0} (\mathbf{v}_{n+1} - \mathbf{v}_n) \cdot \mathbf{v}_{n+\frac{1}{2}} \rho_0 \, dV \\ &= \frac{1}{2} \int_{\mathcal{B}_0} (\mathbf{v}_{n+1} \cdot \mathbf{v}_{n+1} - \mathbf{v}_n \cdot \mathbf{v}_n) \rho_0 \, dV \\ &= T_{n+1} - T_n. \end{aligned} \quad (86)$$

Next, we replace the test functions ($\mathbf{w}_{\mathbf{C}}$, $\mathbf{w}_{\mathbf{G}}$, w_C) in (67) with $(\mathbf{C}_{n+1} - \mathbf{C}_n, \mathbf{G}_{n+1} - \mathbf{G}_n, C_{n+1} - C_n) \in \mathbb{V}_{\mathbf{A}}^0 \times \mathbb{V}_{\mathbf{A}}^0 \times \mathbb{V}_A^0$, and thus obtain

$$\begin{aligned} \int_{\mathcal{B}_0} \mathbf{D}_{\mathbf{C}} \mathcal{F} : (\mathbf{C}_{n+1} - \mathbf{C}_n) \, dV &= \\ &= \int_{\mathcal{B}_0} \left(\boldsymbol{\Lambda}_{n+1}^{\mathbf{C}} - \boldsymbol{\Lambda}_{n+1}^{\mathbf{G}} \otimes \mathbf{C}_{n+\frac{1}{2}} - \frac{1}{3} \boldsymbol{\Lambda}_{n+1}^{\mathbf{C}} \mathbf{G}_{n+\frac{1}{2}} \right) : (\mathbf{C}_{n+1} - \mathbf{C}_n) \, dV, \\ \int_{\mathcal{B}_0} \mathbf{D}_{\mathbf{G}} \mathcal{F} : (\mathbf{G}_{n+1} - \mathbf{G}_n) \, dV &= \int_{\mathcal{B}_0} \left(\boldsymbol{\Lambda}_{n+1}^{\mathbf{G}} - \frac{1}{3} \boldsymbol{\Lambda}_{n+1}^{\mathbf{C}} \mathbf{C}_{n+\frac{1}{2}} \right) : (\mathbf{G}_{n+1} - \mathbf{G}_n) \, dV, \\ \int_{\mathcal{B}_0} \mathbf{D}_C \mathcal{F} (C_{n+1} - C_n) \, dV &= \int_{\mathcal{B}_0} \boldsymbol{\Lambda}_{n+1}^{\mathbf{C}} (C_{n+1} - C_n) \, dV. \end{aligned} \quad (87)$$

In addition, we replace the test functions (w_{θ} , w_{Φ} , $\mathbf{w}_{\mathbf{D}_0}$) in (66)₃₋₅ with $(1, \Phi_{n+1} - \Phi_n, \mathbf{D}_{0n+1} - \mathbf{D}_{0n}) \in \mathbb{V}_{\theta}^0 \times \mathbb{V}_{\Phi}^0 \times \mathbb{V}_{\mathbf{D}_0}^0$. Inserting the constitutive relations and subtracting (66)₄ from (66)₅ then yields

$$\begin{aligned} \int_{\mathcal{B}_0} \mathbf{D}_{\theta} \mathcal{F} (\theta_{n+1} - \theta_n) \, dV &= \int_{\mathcal{B}_0} (-\theta_{n+1} \eta_{n+1} + \theta_n \eta_n) \, dV, \\ \int_{\mathcal{B}_0} \mathbf{D}_{\mathbf{D}_0} \mathcal{F} \cdot (\mathbf{D}_{0n+1} - \mathbf{D}_{0n}) \, dV &= \int_{\mathcal{B}_0} (-\nabla_{\mathbf{X}} \Phi_{n+1} \mathbf{D}_{0n+1} + \nabla_{\mathbf{X}} \Phi_n \mathbf{D}_{0n}) \, dV. \end{aligned} \quad (88)$$

The enforcement of the constraints on position level in the equations of (68) can be transferred to the velocity level, as shown in [BJH18]. More precisely, if the equations in (68) hold at both time t_n and time t_{n+1} , one can show that

$$\begin{aligned}
& \int_{\mathcal{B}_0} \mathbf{w}_{\Lambda^C} : (\mathbf{C}_{n+1} - \mathbf{C}_n) \, dV = \\
& \quad \int_{\mathcal{B}_0} \mathbf{w}_{\Lambda^C} : \left(\left((\nabla_{\mathbf{X}} \boldsymbol{\varphi}_{n+1})^{\text{T}} - (\nabla_{\mathbf{X}} \boldsymbol{\varphi}_n)^{\text{T}} \right) \nabla_{\mathbf{X}} \boldsymbol{\varphi}_{n+\frac{1}{2}} \right. \\
& \quad \quad \left. + (\nabla_{\mathbf{X}} \boldsymbol{\varphi}_{n+\frac{1}{2}})^{\text{T}} (\nabla_{\mathbf{X}} \boldsymbol{\varphi}_{n+1} - \nabla_{\mathbf{X}} \boldsymbol{\varphi}_n) \right) \, dV, \tag{89} \\
& \int_{\mathcal{B}_0} \mathbf{w}_{\Lambda^G} : \left(\mathbf{C}_{n+\frac{1}{2}} \otimes (\mathbf{C}_{n+1} - \mathbf{C}_n) - (\mathbf{G}_{n+1} - \mathbf{G}_n) \right) \, dV = 0, \\
& \int_{\mathcal{B}_0} w_C \left(\frac{1}{3} \mathbf{C}_{n+\frac{1}{2}} : (\mathbf{G}_{n+1} - \mathbf{G}_n) + \frac{1}{3} \mathbf{G}_{n+\frac{1}{2}} : (\mathbf{C}_{n+1} - \mathbf{C}_n) - (C_{n+1} - C_n) \right) \, dV = 0
\end{aligned}$$

also holds.

Next, we consider the directionality property of the discrete derivatives (73) as well as the relations (87) and (88). By making the additional assumption that the test functions $(\mathbf{w}_{\Lambda^C}, \mathbf{w}_{\Lambda^G}, w_{\Lambda^C})$ in (89) take the admissible values $(\boldsymbol{\Lambda}_{n+1}^C, \boldsymbol{\Lambda}_{n+1}^G, \Lambda_{n+1}^C) \in \mathbb{V}_{\mathbf{A}}^0 \times \mathbb{V}_{\mathbf{A}}^0 \times \mathbb{V}_A^0$, we can show that the difference $U_{n+1} - U_n$ (see (84)) yields

$$\begin{aligned}
U_{n+1} - U_n &= \int_{\mathcal{B}_0} \mathcal{F}(\boldsymbol{\nu}_{n+1}) - \mathcal{F}(\boldsymbol{\nu}_n) \, dV \\
& \quad + \int_{\mathcal{B}_0} \mathbf{D}_{0n+1} \cdot \nabla_{\mathbf{X}} \Phi_{n+1} - \mathbf{D}_{0n} \cdot \nabla_{\mathbf{X}} \Phi_n + \theta_{n+1} \eta_{n+1} - \theta_n \eta_n \, dV \\
&= \int_{\mathcal{B}_0} \mathbf{D}_C \mathcal{F} : \Delta \mathbf{C} + \mathbf{D}_G \mathcal{F} : \Delta \mathbf{G} + \mathbf{D}_C \mathcal{F} \Delta C + \mathbf{D}_{D_0} \mathcal{F} \cdot \Delta \mathbf{D}_0 \, dV \\
& \quad + \int_{\mathcal{B}_0} \mathbf{D}_\theta \mathcal{F} \Delta \theta + \mathbf{D}_{0n+1} \cdot \nabla_{\mathbf{X}} \Phi_{n+1} - \mathbf{D}_{0n} \cdot \nabla_{\mathbf{X}} \Phi_n + \theta_{n+1} \eta_{n+1} - \theta_n \eta_n \, dV \\
&= \int_{\mathcal{B}_0} \boldsymbol{\Lambda}_{n+1}^C : (\mathbf{C}_{n+1} - \mathbf{C}_n) \, dV \\
& \quad - \int_{\mathcal{B}_0} \boldsymbol{\Lambda}_{n+1}^G : \left(\mathbf{C}_{n+\frac{1}{2}} \otimes (\mathbf{C}_{n+1} - \mathbf{C}_n) - (\mathbf{G}_{n+1} - \mathbf{G}_n) \right) \, dV \\
& \quad - \int_{\mathcal{B}_0} \left(\frac{1}{3} \mathbf{C}_{n+\frac{1}{2}} : (\mathbf{G}_{n+1} - \mathbf{G}_n) + \frac{1}{3} \mathbf{G}_{n+\frac{1}{2}} : (\mathbf{C}_{n+1} - \mathbf{C}_n) - (C_{n+1} - C_n) \right) \, dV \\
&= \int_{\mathcal{B}_0} \boldsymbol{\Lambda}_{n+1}^C : \left(\left((\nabla_{\mathbf{X}} \boldsymbol{\varphi}_{n+1})^{\text{T}} - (\nabla_{\mathbf{X}} \boldsymbol{\varphi}_n)^{\text{T}} \right) \nabla_{\mathbf{X}} \boldsymbol{\varphi}_{n+\frac{1}{2}} \right. \\
& \quad \quad \left. + (\nabla_{\mathbf{X}} \boldsymbol{\varphi}_{n+\frac{1}{2}})^{\text{T}} (\nabla_{\mathbf{X}} \boldsymbol{\varphi}_{n+1} - \nabla_{\mathbf{X}} \boldsymbol{\varphi}_n) \right) \, dV \\
&= - \int_{\mathcal{B}_0} (\boldsymbol{\varphi}_{n+1} - \boldsymbol{\varphi}_n) \cdot \frac{\rho_0}{\Delta t} (\mathbf{v}_{n+1} - \mathbf{v}_n) \, dV, \tag{90}
\end{aligned}$$

where (66)₂ is used on the last step of equation (90), for the specific case where $\mathbf{w}_\varphi = \boldsymbol{\varphi}_{n+1} - \boldsymbol{\varphi}_n \in \mathbb{V}_\varphi^0$. Finally, with the help of (86), we can conclude that indeed the last expression in (90) coincides with the (minus) increment of the kinetic energy, namely

$$U_{n+1} - U_n = - \int_{\mathcal{B}_0} (\boldsymbol{\varphi}_{n+1} - \boldsymbol{\varphi}_n) \cdot \frac{\rho_0}{\Delta t} (\mathbf{v}_{n+1} - \mathbf{v}_n) \, dV = - (T_{n+1} - T_n). \tag{91}$$

In summary, the proposed time-discrete version of the weak form conserves the total energy of the system, which is essentially due to the directionality property of the discrete derivatives.

6 Space discretization: Finite element method

We employ the finite element method for the spatial discretization of the time-discrete weak form proposed throughout equations (66)-(68). For this purpose, the body \mathcal{B}_0 is subdivided into n_e non-overlapping finite elements such that

$$\mathcal{B}_0 \approx \mathcal{B}_0^h = \bigcup_{e=1}^{n_e} \mathcal{B}_0^e, \quad (92)$$

where the superscript $(\bullet)^h$ indicates an approximation. Furthermore, we utilize the isoparametric concept for the discretization in space. Accordingly, we interpolate the continuous field quantities $\mathcal{C} = (\mathbf{v}_t, \boldsymbol{\varphi}_t, \theta_t, \Phi_t)$ as specified by the function spaces $\mathbb{V}_{\mathbf{v}}^h \times \mathbb{V}_{\boldsymbol{\varphi}}^h \times \mathbb{V}_{\theta}^h \times \mathbb{V}_{\Phi}^h$, given by

$$\begin{aligned} \mathbb{V}_{\mathbf{v}}^h &= \{\mathbf{v}_t \in \mathbb{V}_{\mathbf{v}} \mid \mathbf{v}_t^h|_{\mathcal{B}_0^e} = \sum_{a=1}^{n_{\text{node}}^c} N^a \mathbf{v}_t^a\}, & \mathbb{V}_{\boldsymbol{\varphi}}^h &= \{\boldsymbol{\varphi}_t \in \mathbb{V}_{\boldsymbol{\varphi}} \mid \boldsymbol{\varphi}_t^h|_{\mathcal{B}_0^e} = \sum_{a=1}^{n_{\text{node}}^c} N^a \boldsymbol{\varphi}_t^a\}, \\ \mathbb{V}_{\theta}^h &= \{\theta_t \in \mathbb{V}_{\theta} \mid \theta_t^h|_{\mathcal{B}_0^e} = \sum_{a=1}^{n_{\text{node}}^c} N^a \theta_t^a\}, & \mathbb{V}_{\Phi}^h &= \{\Phi_t \in \mathbb{V}_{\Phi} \mid \Phi_t^h|_{\mathcal{B}_0^e} = \sum_{a=1}^{n_{\text{node}}^c} N^a \Phi_t^a\}. \end{aligned} \quad (93)$$

Therein, n_{node}^c indicates the number of nodes used per element for the approximation of the corresponding continuous quantity and $N^a : \mathcal{B}_0^e \rightarrow \mathbb{R}$ denotes the nodal shape functions. Following the work in [Fra+19], we make use of a discontinuous interpolation of the remaining fields $\mathcal{D} = (\mathbf{D}_{0t}, \mathbf{C}_t, \mathbf{G}_t, C_t, \boldsymbol{\Lambda}_t^c, \boldsymbol{\Lambda}_t^g, \Lambda_t^c)$. This entails that these fields can actually be discretized independently on each element of the mesh, enabling the use of a static condensation process before assembling the global tangent matrix (for more details see Appx. A). Doing so leads to an efficient formulation from a computational costs standpoint. The interpolation of these fields is carried out according to the function spaces $\mathbb{V}_{\mathbf{D}_0}^h \times \mathbb{V}_{\mathbf{A}}^h \times \mathbb{V}_{\mathbf{A}}^h \times \mathbb{V}_{\mathbf{A}}^h \times \mathbb{V}_{\mathbf{A}}^h \times \mathbb{V}_{\mathbf{A}}^h \times \mathbb{V}_{\mathbf{A}}^h$, specified as

$$\begin{aligned} \mathbb{V}_{\mathbf{D}_0}^h &= \{\mathbf{D}_{0t} \in \mathbb{V}_{\mathbf{D}_0} \mid \mathbf{D}_{0t}^h|_{\mathcal{B}_0^e} = \sum_{a=1}^{n_{\text{node}}^d} M^a \mathbf{D}_{0t}^a\}, & \mathbb{V}_{\mathbf{A}}^h &= \{\mathbf{A}_t \in \mathbb{V}_{\mathbf{A}} \mid \mathbf{A}_t^h|_{\mathcal{B}_0^e} = \sum_{a=1}^{n_{\text{node}}^d} M^a \mathbf{A}_t^a\}, \\ \mathbb{V}_{\mathbf{A}}^h &= \{A_t \in \mathbb{V}_{\mathbf{A}} \mid A_t^h|_{\mathcal{B}_0^e} = \sum_{a=1}^{n_{\text{node}}^d} M^a A_t^a\}, \end{aligned} \quad (94)$$

where n_{node}^d denotes the number of nodes used to interpolate the discontinuous fields \mathcal{D} within one finite element. Note that it is also possible to approximate the variables in a different way. However, for the sake of simplicity, we restrict ourselves in this work to the form presented above. The test functions are approximated following a Bubnov-Galerkin approach. More precisely, we choose $(\mathbf{w}_{\mathbf{v}}, \mathbf{w}_{\boldsymbol{\varphi}}, w_{\theta}, w_{\Phi}) \in \mathbb{V}_{\mathbf{v}}^{0,h} \times \mathbb{V}_{\boldsymbol{\varphi}}^{0,h} \times \mathbb{V}_{\theta}^{0,h} \times \mathbb{V}_{\Phi}^{0,h}$, where

$$\begin{aligned} \mathbb{V}_{\mathbf{v}}^{0,h} &= \{\mathbf{w}_{\mathbf{v}} \in \mathbb{V}_{\mathbf{v}}^0 \mid \mathbf{w}_{\mathbf{v}}^h|_{\mathcal{B}_0^e} = \sum_{a=1}^{n_{\text{node}}^c} N^a \mathbf{w}_{\mathbf{v}}^a\}, & \mathbb{V}_{\boldsymbol{\varphi}}^{0,h} &= \{\mathbf{w}_{\boldsymbol{\varphi}} \in \mathbb{V}_{\boldsymbol{\varphi}}^0 \mid \mathbf{w}_{\boldsymbol{\varphi}}^h|_{\mathcal{B}_0^e} = \sum_{a=1}^{n_{\text{node}}^c} N^a \mathbf{w}_{\boldsymbol{\varphi}}^a\}, \\ \mathbb{V}_{\theta}^{0,h} &= \{w_{\theta} \in \mathbb{V}_{\theta}^0 \mid w_{\theta}^h|_{\mathcal{B}_0^e} = \sum_{a=1}^{n_{\text{node}}^c} N^a w_{\theta}^a\}, & \mathbb{V}_{\Phi}^{0,h} &= \{w_{\Phi} \in \mathbb{V}_{\Phi}^0 \mid w_{\Phi}^h|_{\mathcal{B}_0^e} = \sum_{a=1}^{n_{\text{node}}^c} N^a w_{\Phi}^a\}, \end{aligned} \quad (95)$$

and $(\mathbf{w}_{D_0}, \mathbf{w}_C, \mathbf{w}_G, w_C, \mathbf{w}_{\Lambda^C}, \mathbf{w}_{\Lambda^G}, \mathbf{w}_{\Lambda^C}) \in \mathbb{V}_{D_0}^h \times \mathbb{V}_A^h \times \mathbb{V}_A^h \times \mathbb{V}_A^h \times \mathbb{V}_A^h \times \mathbb{V}_A^h \times \mathbb{V}_A^h$. Inserting the spatial approximations into the time-discrete weak form in (66)-(68) yields

$$\begin{aligned}
\mathbf{A}_{e=1}^{n_e} \sum_{a=1}^{n_{\text{node}}^C} \mathbf{w}_v^a \cdot \mathbf{R}_v^{a,e} &= 0, & \mathbf{A}_{e=1}^{n_e} \sum_{a=1}^{n_{\text{node}}^C} \mathbf{w}_\varphi^a \cdot \mathbf{R}_\varphi^{a,e} &= 0, \\
\mathbf{A}_{e=1}^{n_e} \sum_{a=1}^{n_{\text{node}}^C} w_\theta^a R_\theta^{a,e} &= 0, & \mathbf{A}_{e=1}^{n_e} \sum_{a=1}^{n_{\text{node}}^C} w_\Phi^a R_\Phi^{a,e} &= 0, \\
\mathbf{A}_{e=1}^{n_e} \sum_{a=1}^{n_{\text{node}}^D} \mathbf{w}_{D_0}^a \cdot \mathbf{R}_{D_0}^{a,e} &= 0, & \mathbf{A}_{e=1}^{n_e} \sum_{a=1}^{n_{\text{node}}^D} \mathbf{w}_C^a : \mathbf{R}_C^{a,e} &= 0, \\
\mathbf{A}_{e=1}^{n_e} \sum_{a=1}^{n_{\text{node}}^D} \mathbf{w}_G^a : \mathbf{R}_G^{a,e} &= 0, & \mathbf{A}_{e=1}^{n_e} \sum_{a=1}^{n_{\text{node}}^D} w_C^a R_C^{a,e} &= 0, \\
\mathbf{A}_{e=1}^{n_e} \sum_{a=1}^{n_{\text{node}}^D} \mathbf{w}_{\Lambda^C}^a : \mathbf{R}_{\Lambda^C}^{a,e} &= 0, & \mathbf{A}_{e=1}^{n_e} \sum_{a=1}^{n_{\text{node}}^D} \mathbf{w}_{\Lambda^G}^a : \mathbf{R}_{\Lambda^G}^{a,e} &= 0, \\
\mathbf{A}_{e=1}^{n_e} \sum_{a=1}^{n_{\text{node}}^D} w_{\Lambda^C}^a R_{\Lambda^C}^{a,e} &= 0, & &
\end{aligned} \tag{96}$$

where $\mathbf{A}_{e=1}^{n_e}$ denotes the assembly operator and where the nodal residuals are defined as

$$\begin{aligned}
\mathbf{R}_v^{a,e} &= \int_{\mathcal{B}_0^e} N^a \left(\frac{1}{\Delta t} (\boldsymbol{\varphi}_{n+1} - \boldsymbol{\varphi}_n) - \mathbf{v}_{n+\frac{1}{2}} \right) \rho_0 \, dV, \\
\mathbf{R}_\varphi^{a,e} &= \int_{\mathcal{B}_0^e} N^a \left(\frac{\rho_0}{\Delta t} (\mathbf{v}_{n+1} - \mathbf{v}_n) \right) + \mathbf{B}_{n+\frac{1}{2}}^{aT} (2\boldsymbol{\Lambda}_{n+1}^C)^V \, dV - \int_{\mathcal{B}_0^e} N^a \bar{\mathbf{B}}_{n+\frac{1}{2}} \, dV, \\
R_\theta^{a,e} &= \int_{\mathcal{B}_0^e} N^a \left(\frac{1}{\Delta t} (\theta_{n+1} \eta_{n+1} - \theta_n \eta_n) + \frac{1}{\Delta t} (\theta_{n+1} - \theta_n) D_\theta \mathcal{F} \right) \, dV \\
&\quad - \int_{\mathcal{B}_0^e} \nabla_{\mathbf{X}} N^a \cdot \mathbf{Q}_{n+\frac{1}{2}} \, dV - \int_{\mathcal{B}_0^e} N^a \bar{R}_{n+\frac{1}{2}} \, dV, \\
R_\Phi^{a,e} &= \int_{\mathcal{B}_0^e} \nabla_{\mathbf{X}} N^a \cdot \mathbf{D}_{0n+\frac{1}{2}} \, dV + \int_{\mathcal{B}_0^e} N^a \rho_{0n+\frac{1}{2}}^e \, dV, \\
\mathbf{R}_{D_0}^{a,e} &= \int_{\mathcal{B}_0^e} M^a \left(\mathbf{D}_{D_0} \mathcal{F} + \nabla_{\mathbf{X}} \Phi_{n+\frac{1}{2}} \right) \, dV, \\
\mathbf{R}_C^{a,e} &= \int_{\mathcal{B}_0^e} M^a \left(\mathbf{D}_C \mathcal{F} - \boldsymbol{\Lambda}_{n+1}^C + \boldsymbol{\Lambda}_{n+1}^G \otimes \mathbf{C}_{n+\frac{1}{2}} + \frac{1}{3} \boldsymbol{\Lambda}_{n+1}^C \mathbf{G}_{n+\frac{1}{2}} \right) \, dV, \\
\mathbf{R}_G^{a,e} &= \int_{\mathcal{B}_0^e} M^a \left(\mathbf{D}_G \mathcal{F} - \boldsymbol{\Lambda}_{n+1}^G + \frac{1}{3} \boldsymbol{\Lambda}_{n+1}^C \mathbf{C}_{n+\frac{1}{2}} \right) \, dV, \\
R_C^{a,e} &= \int_{\mathcal{B}_0^e} M^a \left(\mathbf{D}_C \mathcal{F} - \boldsymbol{\Lambda}_{n+1}^C \right) \, dV, \\
\mathbf{R}_{\Lambda^C}^{a,e} &= \int_{\mathcal{B}_0^e} M^a \left((\nabla_{\mathbf{X}} \boldsymbol{\varphi}_{n+1})^T \nabla_{\mathbf{X}} \boldsymbol{\varphi}_{n+1} - \mathbf{C}_{n+1} \right) \, dV, \\
\mathbf{R}_{\Lambda^G}^{a,e} &= \int_{\mathcal{B}_0^e} M^a \left(\frac{1}{2} \mathbf{C}_{n+1} \otimes \mathbf{C}_{n+1} - \mathbf{G}_{n+1} \right) \, dV, \\
R_{\Lambda^C}^{a,e} &= \int_{\mathcal{B}_0^e} M^a \left(\frac{1}{3} \mathbf{G}_{n+1} : \mathbf{C}_{n+1} - C_{n+1} \right) \, dV.
\end{aligned} \tag{97}$$

In the above, $\mathbf{B}^a \in \mathbb{R}^{6 \times 3}$ is the standard nodal operator matrix and $(\bullet)^V$ refers to Voigt's vector notation of symmetric stress-related quantities. Note that we have omitted the superscript $(\bullet)^h$

in the representation of the residuals (97), for clarity.

7 Numerical examples

In this section, we investigate the properties of the novel mixed thermo-electro-mechanic formulation numerically in a variety of examples. Therein, three different finite element families are employed for space discretization. These are:

1. $H1^c H0^d$: Continuous trilinear hexahedral elements for φ , Φ , and θ . Discontinuous constant hexahedral elements for \mathbf{D}_0 , Σ , and Λ .
2. $P2^c P1^d$: Continuous triquadratic tetrahedral elements for φ , Φ , and θ . Discontinuous trilinear tetrahedral elements for \mathbf{D}_0 , Σ , and Λ .
3. $H2^c H1^d$: Continuous triquadratic serendipity-type hexahedral elements for φ , Φ , and θ . Discontinuous trilinear hexahedral elements for \mathbf{D}_0 , Σ , and Λ .

The nodal points of the different finite element mesh types are given in Fig. 1 for convenience.

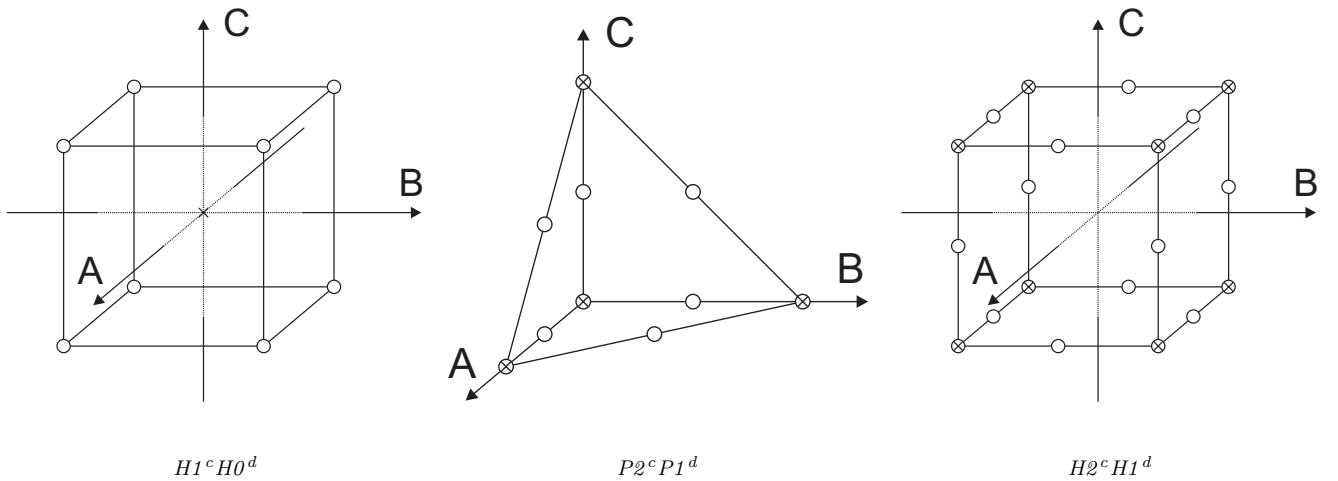


Figure 1: Nodal points of the different finite element families. The nodes of the continuous fields are represented by bullets \circ , whereas the nodes of the discontinuous mixed fields are indicated by crosses \times .

We employ the enhanced Mooney-Rivlin material model proposed in Ex. 1 for the numerical investigations. In that regard, the material parameters provided by Tab. 1 are used for all subsequent examples.

Mechanical parameters	a	25000	Pa
	b	50000	Pa
	c	500000	Pa
	d	250000	Pa
	e	5209	Pa
Mass density (transient examples)	ρ_0	1000	kgm^{-3}
Specific heat capacity	κ	1500	$\text{JK}^{-1}\text{m}^{-3}$
Coupling coefficient	β	2.233×10^{-4}	K^{-1}
Thermal conductivity	k_0	0.23	$\text{WK}^{-1}\text{m}^{-1}$
Reference temperature	θ_R	293.15	K
Relative permittivity	ε_r	4	-

Table 1: Material parameters employed for the numerical examples.

7.1 Patch test

The purpose of the widely used patch test is to verify that a finite element formulation is capable of correctly reproducing homogeneous states of stress - even with distorted meshes. This is a fundamental condition that any admissible finite element formulation has to fulfill. To show that the novel mixed formulation passes this patch test requirement, we consider a cube-shaped body $\mathcal{B}_0 = [0, 1]^3 \text{m}^3$, which has an initial temperature of $\theta_0 = 293.15 \text{K}$ and is investigated with two different finite element meshes (see Fig. 2). The initial coordinates of the inner nodes of the distorted mesh can be found in [MH85]. We employ $H2^c H1^d$ elements for both the regular and the distorted mesh. For the sake of simplicity, equivalent results for the $H1^c H0^d$ and $P2^c P1^d$ elements are not shown in Fig. 2-5.

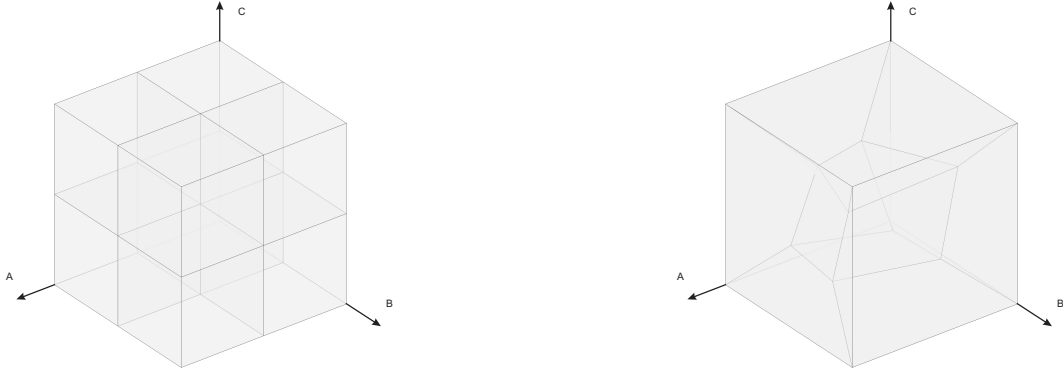


Figure 2: The regular (left) and the distorted (right) mesh employed in the patch test.

The simulation is performed for a total time $T = 1 \text{s}$ with a time step size $\Delta t = 0.1 \text{s}$ and a tolerance of Newton's method of $\mathbf{eps} = 1 \times 10^{-6}$. During the simulation, the body is held on three faces to prevent translational and rotational movements and is compressed displacement-driven to half of its original height. These specifications can be expressed with respect to the initial configuration by the mechanical Dirichlet boundary conditions

$$\begin{aligned}
 \bar{\varphi}_1(X_1 = 0, X_2, X_3) &= 0, \\
 \bar{\varphi}_2(X_1, X_2 = 0, X_3) &= 0, \\
 \bar{\varphi}_3(X_1, X_2, X_3 = 0) &= 0,
 \end{aligned} \tag{98}$$

and

$$\bar{\varphi}_3(X_1, X_2, X_3 = 1 \text{ m}) = 1 \text{ m} - \frac{t}{T} 0.5 \text{ m}. \quad (99)$$

The compression causes the body to expand in the X_1 and X_2 directions and to heat up, which is due to the chosen material model. Note that the patch test presented here is a quasi-static example, since we neglect the transient effects for the mechanical and the electrical part, but consider them for the thermal part. **Thus, the proposed integrator is active and the discrete gradients are in use. Furthermore, we choose $\rho_0 = 0$.** We subsequently investigate, whether the formulation is able to reproduce a homogeneous state of stress as well as a homogeneous temperature distribution and a homogeneous distribution of the electric potential, as it can be expected for the patch test. We use von Mises stress σ_{vM} as stress measure, where the required Cauchy stress tensor can be obtained by

$$\boldsymbol{\sigma} = \frac{2}{J} \mathbf{F} \boldsymbol{\Lambda}^C \mathbf{F}^T. \quad (100)$$

As Figs. 3, 4, and 5 show, the novel formulation satisfies the patch test requirement. More precisely, a simulation with the given parameters leads to a homogeneous stress, temperature, and electric potential distribution for both the regular and the distorted mesh.

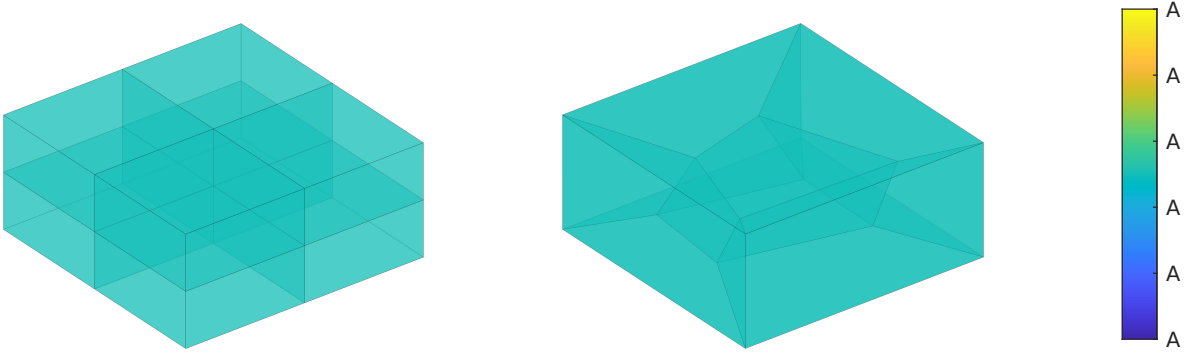


Figure 3: Von Mises stress distribution σ_{vM} [Pa] resulting from the patch test for the regular and the distorted mesh.

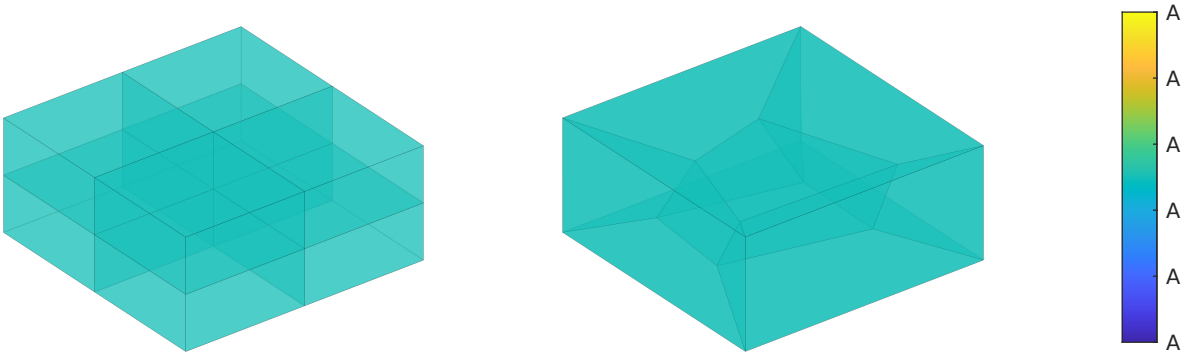


Figure 4: Temperature distribution θ [K] resulting from the patch test for the regular and the distorted mesh.

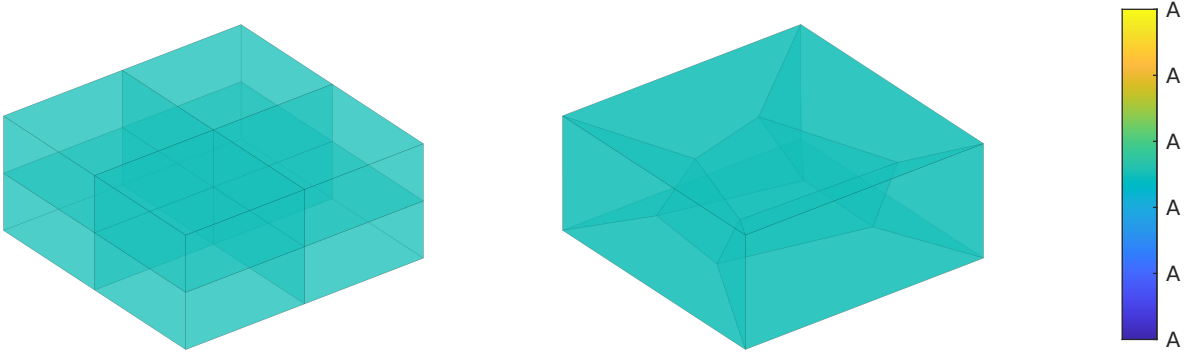


Figure 5: Electric potential distribution Φ [V] resulting from the patch test for the regular and the distorted mesh.

7.2 Analytical convergence analysis

The idea of this example is to numerically verify the spatial order of all fields for the finite element families $H1^c H0^d$, $P2^c P1^d$, and $H2^c H1^d$ (cf. [Fra+19; Fra+22a; Poy+18]). For this ad-hoc manufactured example all time effects are neglected, such that we have a thermo-electro-elastostatic problem with stationary heat conduction. Accordingly, the proposed integrator is not employed for this example.

We again consider a cube-shaped body $\mathcal{B}_0 = [0, 1]^3 \text{ m}^3$. For the analytical convergence analysis we assume solutions of the form

$$\begin{aligned}\varphi^a &= (X_1 + \Gamma_1 X_1^3) \mathbf{e}_1 + (X_2 + \Gamma_2 X_2^3) \mathbf{e}_2 + (X_3 + \Gamma_3 X_3^3) \mathbf{e}_3, \\ \theta^a &= \tilde{\theta} X_2^3 + 293.15 \text{ K}, \\ \Phi^a &= \tilde{\Phi} X_1^3,\end{aligned}\tag{101}$$

for the primary fields, where $\Gamma_k = 0.01 k$, $k \in \{1, 2, 3\}$, $\tilde{\theta} = 10 \text{ K}$, and $\tilde{\Phi} = 100 \text{ V}$. These assumed solutions allow to compute the first Piola-Kirchhoff stress tensor, the Lagrangian electric displacement vector, and the Piola heat flux vector⁶ analytically. Eventually, we compute the body force, charge density, and heat source analytically via the strong form given by (42) as

$$\bar{\mathbf{B}}^a = -\text{Div } \mathbf{P}^a, \quad \bar{\rho}_0^{e,a} = \text{Div } \mathbf{D}_0^a, \quad \bar{R}^a = \text{Div } \mathbf{Q}^a,\tag{102}$$

where all time effects are neglected. The above analytically computed values are subsequently used for the numerical simulations. In that regard, Dirichlet boundaries are imposed at the faces of the body for all fields in agreement with the assumed analytical solutions (101). In particular, considering Fig. 6, outer faces (patterned surfaces) of the body are imposed with Dirichlet boundary conditions by φ^a , Φ^a , and θ^a , given by (101). The simulation is performed for a total time $T = 1 \text{ s}$ with a time step size $\Delta t = 0.1 \text{ s}$ and a tolerance of Newton's method of $\text{eps} = 1 \times 10^{-6}$. Snapshots of the final mesh with von Mises stress, electric potential distribution, and absolute temperature field are depicted in Fig. 7 for $P2^c P1^d$ and $H2^c H1^d$ elements. Eventually, the analytical solutions in (101) for all fields $(\bullet)^a$ are compared to the numerically computed solutions (\bullet) . For this purpose, the h-convergence rate is computed by employing the L_2 norm of the error $e_{(\bullet)}$, given by

$$\|e_{(\bullet)}\|_{L_2} = \frac{\|(\bullet) - (\bullet)^a\|_{L_2}}{\|(\bullet)^a\|_{L_2}},\tag{103}$$

⁶ A detailed survey of the analytical computations is provided in Appx. B.

where

$$\|(\bullet)\|_{L_2} = \left[\int_{B_0} \langle (\bullet), (\bullet) \rangle dV \right]^{\frac{1}{2}}. \quad (104)$$

To this end, the h-convergence results are depicted in Fig. 8. As expected, at least $p+1$ convergence is observed for all fields for the considered elements.

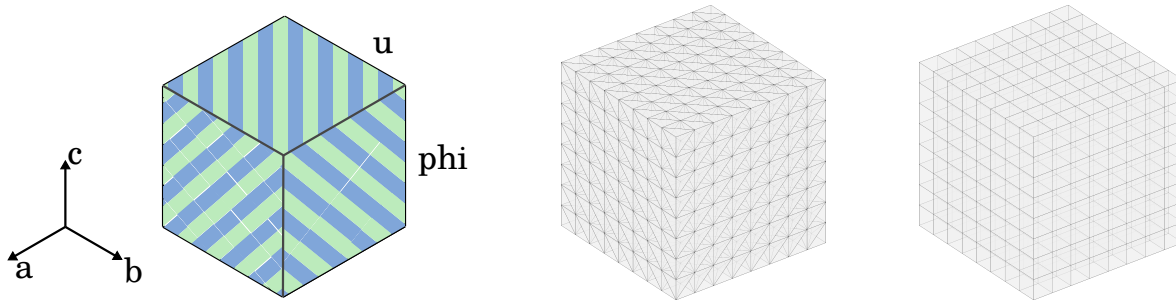


Figure 6: Dirichlet boundary conditions (left), initial $P2P1^d$ (mid), and $H2^cH1^d$ (right) meshes employed for the analytical convergence analysis example.

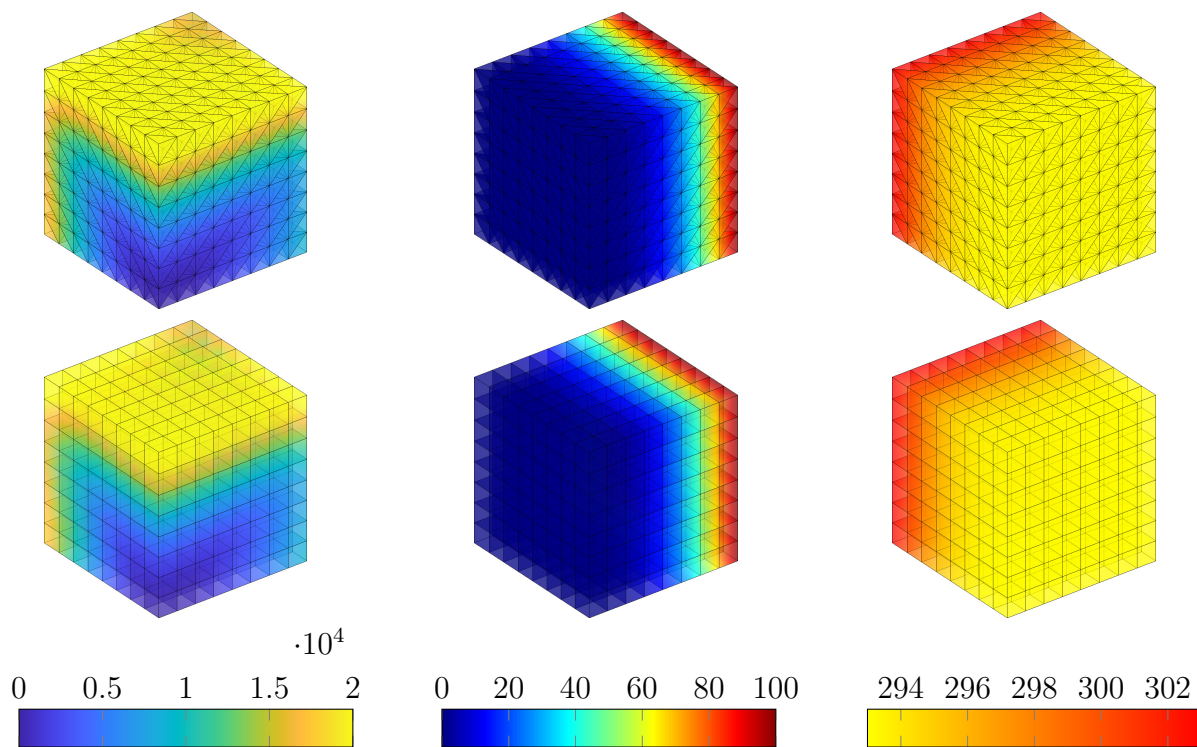


Figure 7: Von Mises stress σ_{vM} [Pa] (left), electric potential Φ [V] (mid), and absolute temperature θ [K] (right) for $P2P1^d$ (top), and $H2^cH1^d$ (bottom) meshes, respectively.

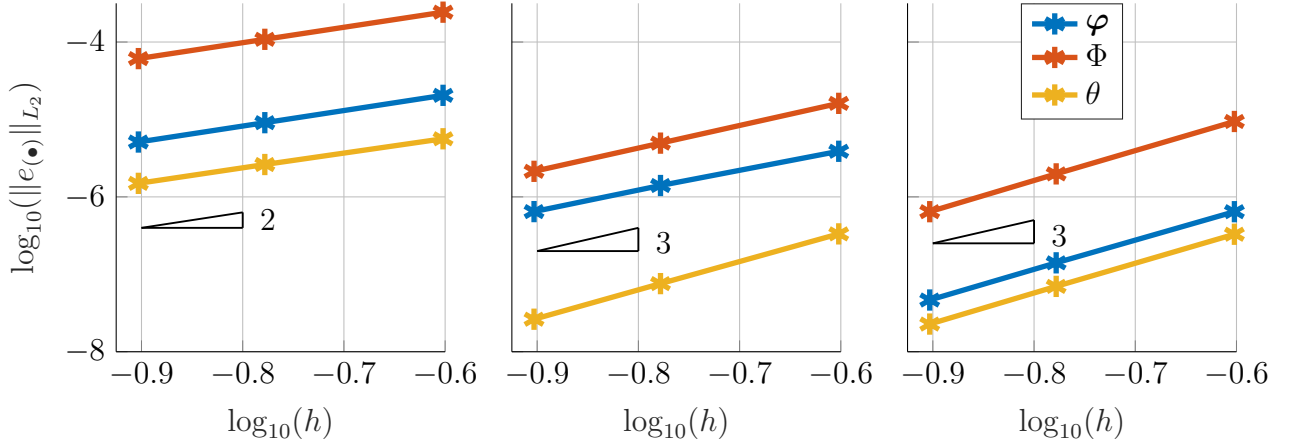


Figure 8: Spatial convergence analysis for H^1cH^0d (left), P^2cP^1d (mid), and H^2cH^1d (right) elements for the analytical convergence analysis example.

7.3 Rotating cross-shaped body

The objective of the first transient example is to illustrate the conservation properties as well as the order of accuracy of the novel mixed formulation. For this purpose, we consider a cross-shaped body, whose geometry and finite element mesh is given in Fig. 9. The finite element mesh consists of a total of 104 H^2cH^1d elements. We further specify electrical Dirichlet boundary conditions of the form

$$\begin{aligned}\bar{\Phi}(X_1, X_2, X_3 = -0.5 \text{ m}, t) &= f(t), \\ \bar{\Phi}(X_1, X_2, X_3 = 0 \text{ m}, t) &= 0,\end{aligned}\tag{105}$$

where

$$f(t) = \begin{cases} \sin\left(\pi t \frac{1}{\text{s}}\right) & \text{for } t \leq 0.5 \text{ s} \\ 1 & \text{for } t > 0.5 \text{ s} \end{cases} \text{ [MV]}.\tag{106}$$

Apart from that, no other Dirichlet boundary conditions are imposed. However, due to a prescribed initial velocity

$$\mathbf{v}_0 = \boldsymbol{\omega} \times \mathbf{X}, \quad \boldsymbol{\omega} = [0, 0, 4]^T \text{ s}^{-1}, \quad \mathbf{X} = [X_1, X_2, X_3]^T,\tag{107}$$

the body rotates around the X_3 -axis during simulation. The system is simulated for a total time $T = 10 \text{ s}$ with a time step size $\Delta t = 0.05 \text{ s}$. Furthermore, we set the tolerance of Newton's method to $\text{eps} = 1 \times 10^{-3}$ and the initial temperature of the body to $\theta_0 = 293.15 \text{ K}$.

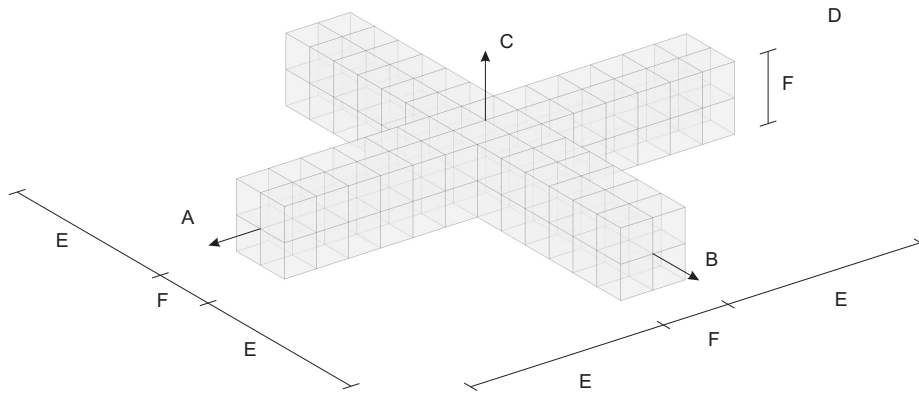


Figure 9: Geometry and finite element mesh of the cross-shaped body

A simulation with the given parameters yields the total angular momentum evolution depicted in Fig. 10. Looking at the differences of the total angular momentum from one time step to the next, it is evident that the novel mixed framework is consistent with respect to the total angular momentum for both the midpoint rule (MP) and the energy-momentum scheme (EM). As Fig. 11 shows, this does not apply to the total energy. While the energy is conserved for $t > 0.5$ s (dashed line) when using the energy-momentum scheme, using the midpoint rule results in an energy blow up.

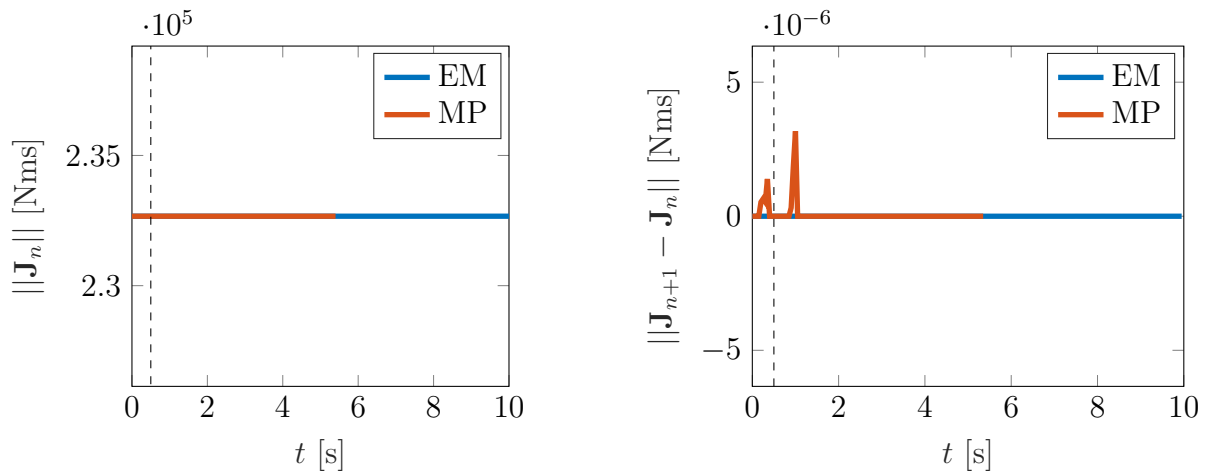


Figure 10: Left: Evolution of the total angular momentum resulting from the rotating cross-shaped body example over the course of the simulation computed using both the energy-momentum scheme (EM) and the midpoint rule (MP). Right: Incremental differences of the total angular momentum from one time step to the next.

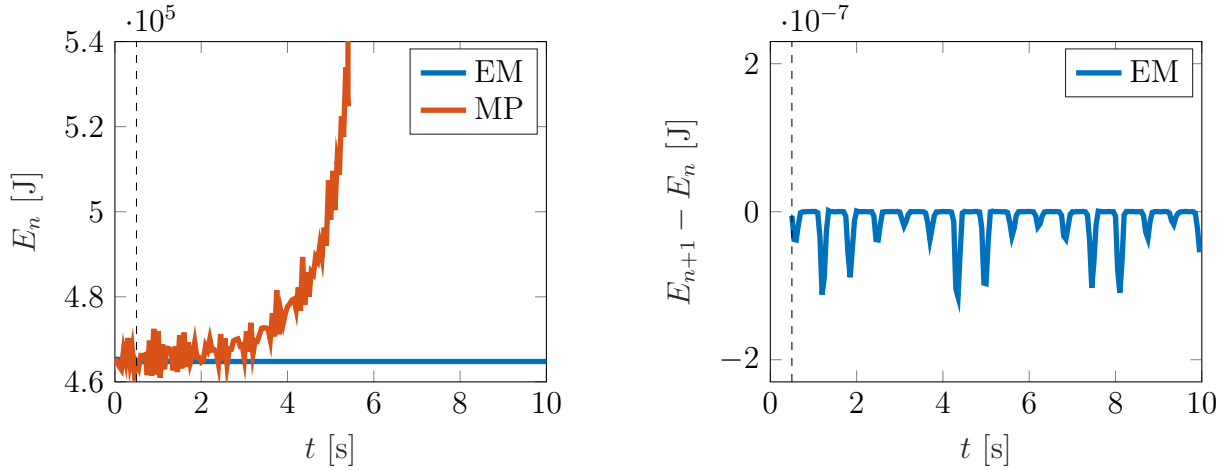


Figure 11: Left: Evolution of the total energy resulting from the rotating cross-shaped body example over the course of the simulation computed using both the energy-momentum scheme (EM) and the midpoint rule (MP). Right: Incremental differences of the total energy from one time step to the next.

Next, we investigate the order of accuracy of the energy-momentum scheme. For this purpose, we compute the L_2 norm of the error, which accumulates in the time interval $0.5 \text{ s} \leq t \leq 0.6 \text{ s}$, for different time step sizes and for all primary variables (φ , θ , Φ). The L_2 norm of the error is computed according to (103). However, for this example, we replace the analytical solution with a reference solution that is computed with a very small time step size ($\Delta t = 2.5 \times 10^{-5} \text{ s}$) due to the lack of an analytical solution. As Fig. 12 shows, the energy-momentum scheme inherits, as expected, the second-order accuracy of the midpoint rule (slopes of the regression lines are $(\varphi, \Phi, \theta) = (2.0449, 2.0127, 2.0242)$).

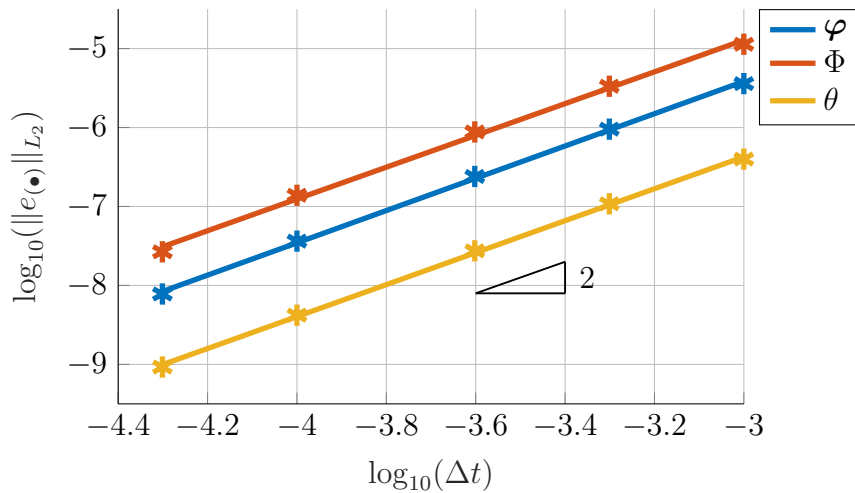


Figure 12: L_2 norm of the error resulting from the rotating cross-shaped body example, plotted for different time step sizes and all primary variables.

7.4 Microfluidic pumping device

The purpose of the final example is to evaluate the proposed energy-momentum scheme within a realistic long-term application.

A sophisticated technical realization of temperature sensitive DEs are microfluidic pumping devices. Such microfluidic pumping devices are employed, for instance, as medical implants, e.g., for micro injection of drugs (see [MHS18]). The microfluidic pumping device to be considered is closely related to the one presented in [MHS18; MPS17] and likewise does not consider fluid-structure interaction. The full shape of the cylindrical pumping device with H^2H1^d mesh is shown in Fig. 13.

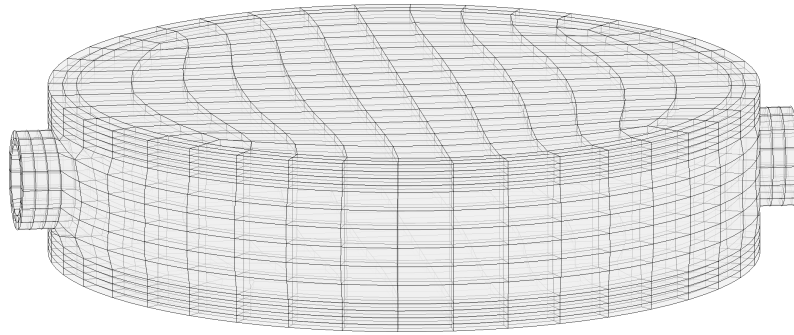


Figure 13: Mesh of the microfluidic pumping device.

Radii and dimensions of main body and outlet nozzle and boundary conditions of the pumping device are provided by Fig. 14. According to the symmetry only one eighth of the device with corresponding symmetry boundary conditions is considered during the simulation (see also Fig. 14).

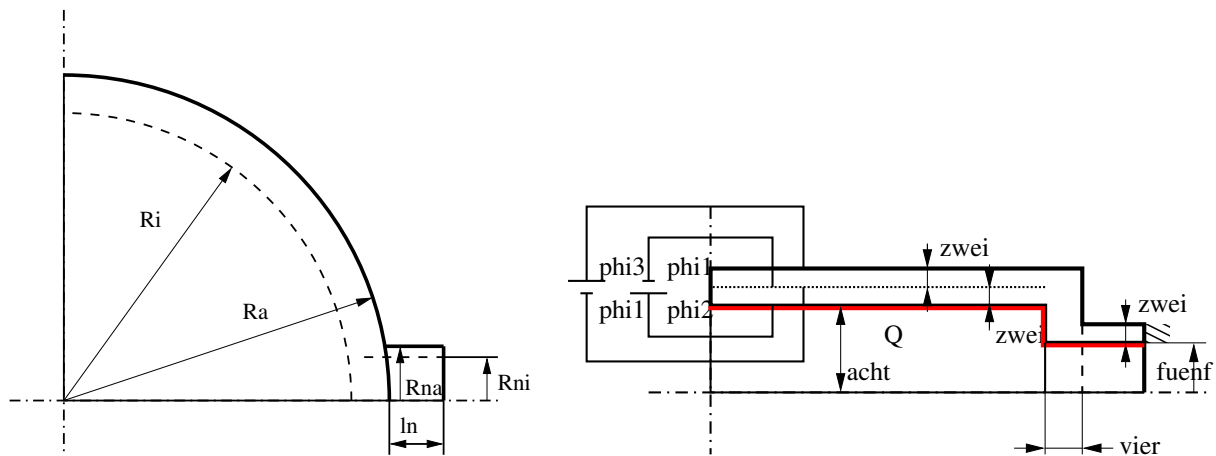


Figure 14: Top view (left) and side view (right) including mechanical (symmetry lines and hatching), electrical (Φ_{1-4}), and thermal (Q) boundary conditions employed for microfluidic pumping device example.

For the pumping purpose two elastomer layers are sandwiched between two compliant electrodes at top and bottom walls, respectively (see Fig. 14, right). In particular, the pumping motion is

controlled by a Dirichlet boundary condition of the electric potential field via

$$\bar{\Phi}_1 = 0 \text{ V}, \quad \bar{\Phi}_2 = \bar{\Phi}_0 \begin{cases} \sin\left(\frac{\pi}{2} \frac{t}{t_k^1}\right) & \forall t \in [t_k^0, t_k^1) \\ 1 & \forall t \in [t_k^1, t_k^2) \\ \cos\left(\frac{\pi}{2} \frac{t-t_k^2}{t_k^3-t_k^2}\right) & \forall t \in [t_k^2, t_k^3) \\ 0 & \forall t \in [t_k^3, t_k^4) \end{cases}, \quad \bar{\Phi}_3 = -\bar{\Phi}_2(t + 16 \text{ s}), \quad (108)$$

where $\bar{\Phi}_0 = 0.75 \text{ GV}$ and $t_k^0 = 32(k-1) \text{ s}$, $t_k^1 = t_k^0 + 4 \text{ s}$, $t_k^2 = t_k^1 + 4 \text{ s}$, $t_k^3 = t_k^2 + 4 \text{ s}$, $t_k^4 = t_k^0 + 32 \text{ s}$, $k \in \mathbb{Z}_{>0} = 1, 2, \dots, n_{\text{cyc}}$ (see also Fig. 15). Furthermore, the heating of the pumped fluid is idealized by a thermal Neumann boundary condition imposed at all internal walls and controlled by

$$\bar{Q} = 0.8 \begin{cases} t & \text{for } t \leq 2 \text{ s} \\ 4 - t & \text{for } 2 \text{ s} < t \leq 4 \text{ s} \\ 0 & \text{for } t > 4 \text{ s} \end{cases} \left[\frac{\text{W}}{\text{m}^2} \right]. \quad (109)$$

The simulation is performed with a total simulation time of $T = 100 \text{ s}$, a time step size of $\Delta t = 0.1 \text{ s}$, and a tolerance of Newton's method of $\text{eps} = 1 \times 10^{-6}$. Accordingly, more than three pumping cycles are performed.

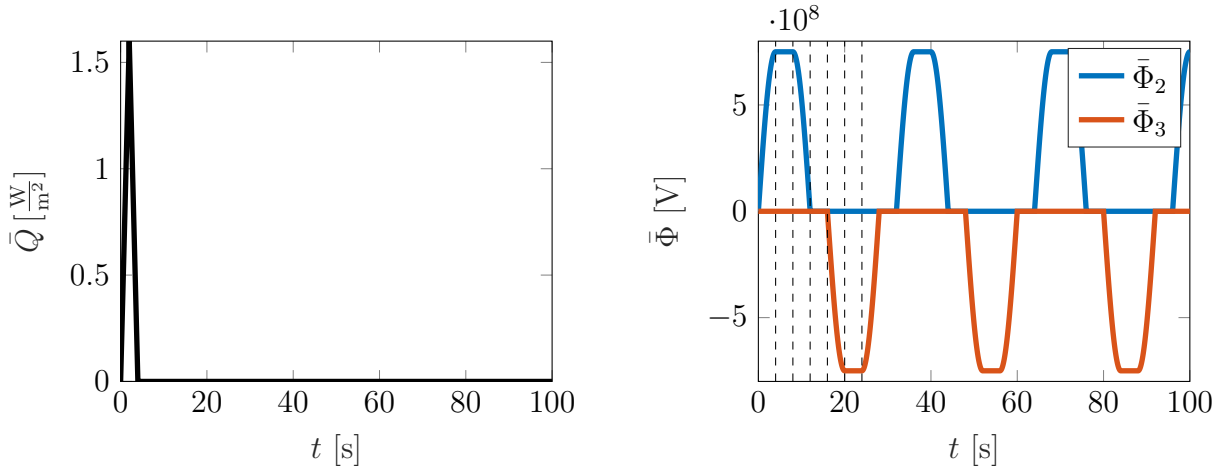


Figure 15: Heating of the pump with \bar{Q} (left) and electric potential fields $\bar{\Phi}_2$ and $\bar{\Phi}_3$ for the pumping process (right) employed for microfluidic pumping device example.

A mesh for one eighth of the device is comprised of 320 H^2H1^d elements with a total of 9290 displacement, electric potential, and absolute temperature unknowns (size of the system of linear equations to be solved after static condensation) is employed.

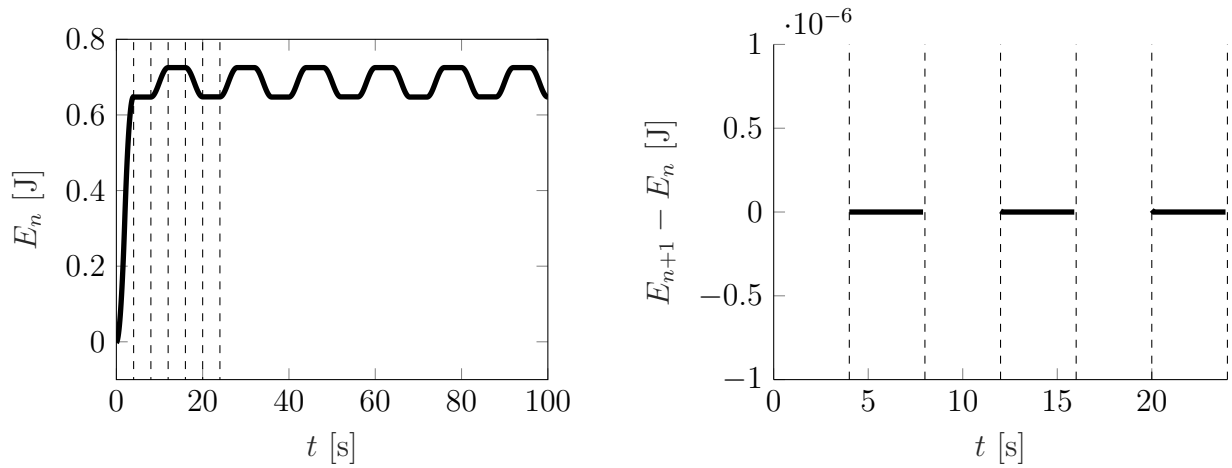


Figure 16: Total energy of the microfluidic pumping device (left) and energy difference (right) for the first pumping cycle, see also Fig. 15 (right).

Snapshots of the motion with electric potential, absolute temperature, and von Mises stress results are shown in Fig. 17 for half of the pumping device. Due to the chosen setting, large deformations, temperature, and electric potential evolutions can be observed. After the heating phase and during constant phases of the applied potential fields (see Fig. 15) the total energy is a constant of motion. To this end the total energy and the energy difference are shown in Fig. 16. As can be observed the energy is perfectly reproduced by the proposed EM integration and is numerically stable during the long-term simulation with periodic loading. Furthermore, the energy difference is bounded by the chosen tolerance of Newton's method.

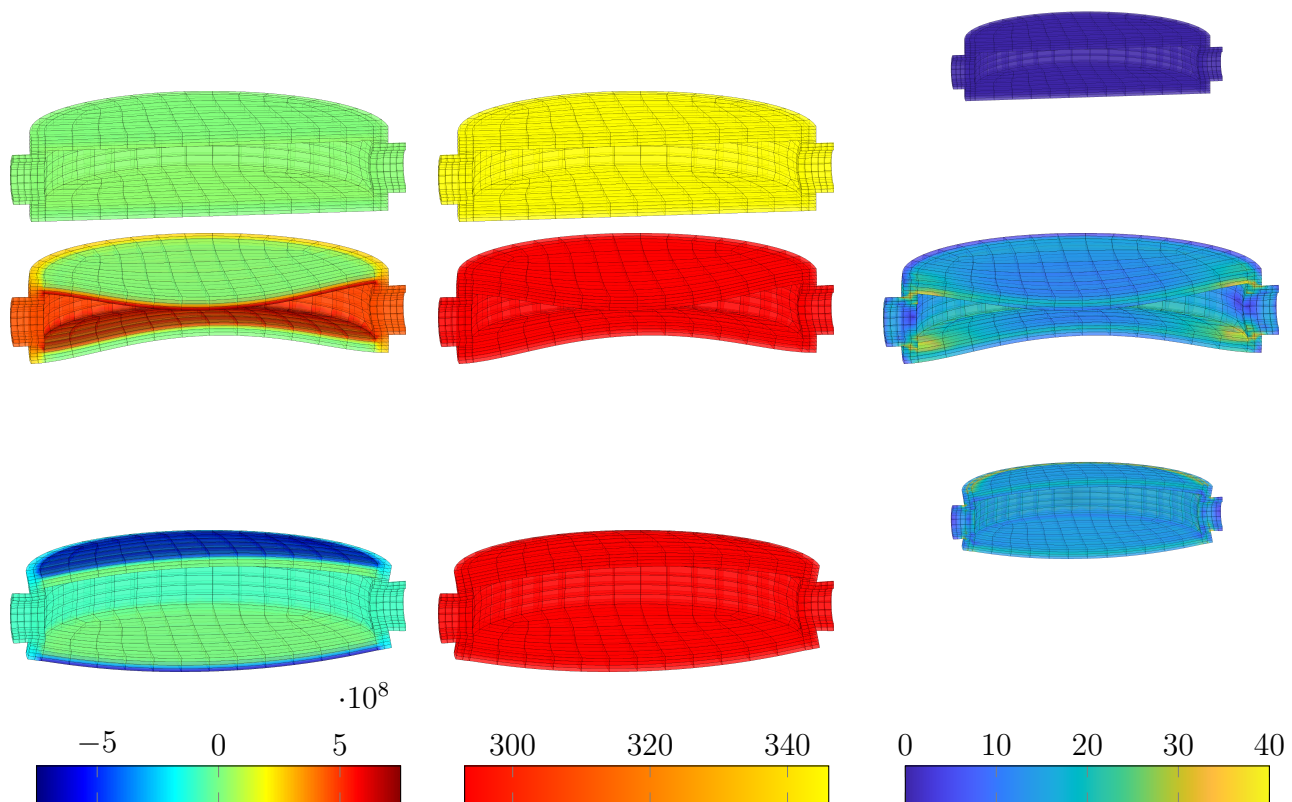


Figure 17: Snapshots of the microfluidic pumping device with electric potential field Φ [V] (left), the absolute temperature field θ [K] (mid), and von Mises stress σ_{vM} [Pa] (right) at $t = 0$ s (top), $t = 6$ s (mid), and $t = 22$ s (bottom).

8 Concluding remarks

In this paper we have presented a novel framework for coupled thermo-electro-elastodynamics. Building upon previous works in the field of elastodynamics [BJH18], electro-elastodynamics [Fra+19; Ort+18], and recently upon thermo-electro-elastodynamics [Fra+22a], we have proposed a new tailor-made multi-field, mixed finite element formulation for the multiphysics context considered. It is worth mentioning that the approach we have chosen to address the problem is not limited to thermo-electro-elastodynamics, but can be applied to design mixed formulations for non-potential (multi-field) systems in general.

The starting point is a variational mixed formulation for elastostatics that is subsequently converted to its associated mixed strong form. In a second step, the mixed strong form is then extended to a mixed coupled strong form by supplementing the equations with the desired physics in form of additional initial boundary value problems and a suitable coupling within, e.g., the energy density function. These two steps can be applied for a variety of different systems, including those with non-potential contributions.

Our present work is based on a mixed elastostatic formulation, which is specifically designed for the case of polyconvex strain energy functions (cf. [BJH18]). This formulation is particularly elegant due to the cascading introduction of independent strain fields and the use of a rather unknown

algebraic operation, namely the tensor cross product. We were able to extend the benefits of this formulation to the case of thermo-electro-elastodynamics by following the aforementioned path. In this context, we have incorporated a state of the art polyconvexity-based thermo-electro-mechanical constitutive model that characterizes the behavior of dielectric elastomers. This model embeds a full interplay between the three physics involved, namely, thermo-electro-mechanics. This is in contrast with a more simplified constitutive model considered in our previous publication [Fra+22a], where the thermal field was coupled exclusively with volumetric deformations.

Furthermore, we have shown how the advantages of energy and momentum consistent time integration schemes can be transferred to multiphysics problems, in particular thermo-electro-elastodynamics.

Finally, we have included a series of numerical examples to investigate the proposed framework. More precisely, we have evaluated the time and space convergence properties as well as the long term stability of the formulation. In doing so, we were able to emphasize the advantageous characteristics of our formulation.

Software

The source code used for the finite element computations is implemented in MATLAB under MIT license and is available at <https://github.com/kit-ifm/moofeKIT>. Version 1.00 of the code, used in this paper, is archived at [Fra+22b].

Acknowledgements

M. Franke acknowledges the financial support provided by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation, project number 443238377). R. Ortigosa acknowledges the financial support through the contract 21132/SF/19, Fundación Séneca, Región de Murcia (Spain), through the program Saavedra Fajardo. R. Ortigosa is also funded by Fundación Séneca (Murcia, Spain) through grant 20911/PI/18 and through grant PID2021-125687OA-I00.

A Static condensation

Analogous to [BJH18], we suggest using a static condensation procedure to obtain an efficient implementation of our framework. To achieve this, we reconsider (97)_{1,2} as

$$\begin{aligned}\mathbf{R}_v^{a,e} &= \mathbf{M}^{ab,e} \left(\frac{1}{\Delta t} (\boldsymbol{\varphi}_{b_{n+1}} - \boldsymbol{\varphi}_{b_n}) - \mathbf{v}_{b_{n+\frac{1}{2}}} \right), \\ \mathbf{R}_\varphi^{a,e} &= \left(\frac{1}{\Delta t} \mathbf{M}^{ab,e} (\mathbf{v}_{b_{n+1}} - \mathbf{v}_{b_n}) \right) + \int_{\mathcal{B}_0^e} \mathbf{B}_{n+\frac{1}{2}}^{aT} (2\boldsymbol{\Lambda}_{n+1}^C)^V dV - \int_{\mathcal{B}_0^e} N^a \bar{\mathbf{B}}_{n+\frac{1}{2}} dV,\end{aligned}\quad (110)$$

where $a, b = 1, \dots, n_{\text{node}}^C$ and we introduce the mass matrix $\mathbf{M}^{ab,e} \in \mathbb{R}^{3 \times 3}$ with⁷

$$\mathbf{M}^{ab,e} = \int_{\mathcal{B}_0^e} \rho_0 N^a N^b dV \mathbf{I}. \quad (111)$$

In order to reduce the number of variables within the static condensation procedure, we first consider (110)₁, which can be transformed into

$$\mathbf{v}_{b_{n+1}} = \frac{2}{\Delta t} (\boldsymbol{\varphi}_{b_{n+1}} - \boldsymbol{\varphi}_{b_n}) - \mathbf{v}_{b_n}. \quad (112)$$

Inserting the above equation into (110)₂ yields

$$\tilde{\mathbf{R}}_\varphi^{a,e} = \frac{2}{\Delta t} \mathbf{M}^{ab,e} \left(\frac{1}{\Delta t} (\boldsymbol{\varphi}_{b_{n+1}} - \boldsymbol{\varphi}_{b_n}) - \mathbf{v}_{b_n} \right) + \int_{\mathcal{B}_0^e} \mathbf{B}_{n+\frac{1}{2}}^{aT} (2\boldsymbol{\Lambda}_{n+1}^C)^V dV - \int_{\mathcal{B}_0^e} N^a \bar{\mathbf{B}}_{n+\frac{1}{2}} dV, \quad (113)$$

which replaces (97)₁ and (97)₂, such that we eventually obtain the vector of nodal residuals

$$\mathbf{R}^e = \begin{bmatrix} \mathbf{R}_{\tilde{\mathcal{C}}}^e \\ \mathbf{R}_{\mathcal{D}}^e \end{bmatrix}, \quad \mathbf{R}_{\tilde{\mathcal{C}}}^e = \begin{bmatrix} \tilde{\mathbf{R}}_{\varphi}^e \\ \mathbf{R}_{\theta}^e \\ \mathbf{R}_{\Phi}^e \end{bmatrix}, \quad \mathbf{R}_{\mathcal{D}}^e = \begin{bmatrix} \mathbf{R}_{\mathbf{D}_0}^e \\ \mathbf{R}_{\mathbf{C}}^e \\ \mathbf{R}_{\mathbf{G}}^e \\ \mathbf{R}_{\mathbf{C}}^e \\ \mathbf{R}_{\boldsymbol{\Lambda}^C}^e \\ \mathbf{R}_{\boldsymbol{\Lambda}^G}^e \\ \mathbf{R}_{\boldsymbol{\Lambda}^C}^e \end{bmatrix}, \quad (114)$$

where $\tilde{\mathcal{C}} = \{\varphi, \theta, \Phi\}$ and $\mathcal{D} = \{\mathbf{D}_0, \mathbf{C}, \mathbf{G}, \mathbf{C}, \boldsymbol{\Lambda}^C, \boldsymbol{\Lambda}^G, \boldsymbol{\Lambda}^C\}$.

Linearization within the framework of Newton's method eventually results in

$$\mathbf{D}\mathbf{R} \Delta \mathbf{q}_{n+1} = \mathbf{K}_T \Delta \mathbf{q}_{n+1}, \quad (115)$$

where $\mathbf{R} = \mathbf{A}_{e=1}^{n_e} \mathbf{R}^e$ denotes the assembled residual vector, $\mathbf{q} = [\mathbf{q}_{\tilde{\mathcal{C}}}^T, \mathbf{q}_{\mathcal{D}}^T]^T$ contains all degrees of freedom, and $\mathbf{K}_T = \mathbf{A}_{e=1}^{n_e} \mathbf{K}_T^e$ is the assembled tangent matrix with the element contributions

$$\mathbf{K}_T^e = \begin{bmatrix} \mathbf{K}_{\tilde{\mathcal{C}}\tilde{\mathcal{C}}}^e & \mathbf{K}_{\tilde{\mathcal{C}}\mathcal{D}}^e \\ \mathbf{K}_{\mathcal{D}\tilde{\mathcal{C}}}^e & \mathbf{K}_{\mathcal{D}\mathcal{D}}^e \end{bmatrix}. \quad (116)$$

For the particular choice of the material model in Ex. 1, we obtain

$$\mathbf{K}_{\tilde{\mathcal{C}}\tilde{\mathcal{C}}}^e = \begin{bmatrix} \mathbf{K}_{\varphi\varphi}^e & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{K}_{\theta\theta}^e & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} \end{bmatrix}, \quad (117)$$

⁷ Note that summation convention applies to pairs of repeated indices in (110).

$$\mathbf{K}_{\tilde{\mathcal{D}}\mathcal{D}}^e = \begin{bmatrix} \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{K}_{\varphi\Lambda^c}^e & \mathbf{0} & \mathbf{0} \\ \mathbf{K}_{\theta\mathcal{D}_0}^e & \mathbf{K}_{\theta\mathcal{C}}^e & \mathbf{K}_{\theta\mathcal{G}}^e & \mathbf{K}_{\theta\mathcal{C}}^e & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{K}_{\Phi\mathcal{D}_0}^e & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} \end{bmatrix}, \quad (118)$$

$$\mathbf{K}_{\mathcal{D}\tilde{\mathcal{C}}}^e = \begin{bmatrix} \mathbf{0} & \mathbf{K}_{\mathcal{D}_0\theta}^e & \mathbf{K}_{\mathcal{D}_0\Phi}^e \\ \mathbf{0} & \mathbf{K}_{\mathcal{C}\theta}^e & \mathbf{0} \\ \mathbf{0} & \mathbf{K}_{\mathcal{G}\theta}^e & \mathbf{0} \\ \mathbf{0} & \mathbf{K}_{\mathcal{C}\theta}^e & \mathbf{0} \\ \mathbf{K}_{\Lambda^c\varphi}^e & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} \end{bmatrix}, \quad (119)$$

and

$$\mathbf{K}_{\mathcal{D}\mathcal{D}}^e = \begin{bmatrix} \mathbf{K}_{\mathcal{D}_0\mathcal{D}_0}^e & \mathbf{K}_{\mathcal{D}_0\mathcal{C}}^e & \mathbf{0} & \mathbf{K}_{\mathcal{D}_0\mathcal{C}}^e & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{K}_{\mathcal{C}\mathcal{D}_0}^e & \mathbf{K}_{\mathcal{C}\mathcal{C}}^e & \mathbf{K}_{\mathcal{C}\mathcal{G}}^e & \mathbf{K}_{\mathcal{C}\mathcal{C}}^e & \mathbf{K}_{\mathcal{C}\Lambda^c}^e & \mathbf{K}_{\mathcal{C}\Lambda^c\mathcal{G}}^e & \mathbf{K}_{\mathcal{D}_0\Lambda^c}^e \\ \mathbf{0} & \mathbf{K}_{\mathcal{G}\mathcal{C}}^e & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{K}_{\mathcal{G}\Lambda^c}^e & \mathbf{K}_{\mathcal{G}\Lambda^c}^e \\ \mathbf{K}_{\mathcal{C}\mathcal{D}_0}^e & \mathbf{K}_{\mathcal{C}\mathcal{C}}^e & \mathbf{0} & \mathbf{K}_{\mathcal{C}\mathcal{C}}^e & \mathbf{0} & \mathbf{0} & \mathbf{K}_{\mathcal{C}\Lambda^c}^e \\ \mathbf{0} & \mathbf{K}_{\Lambda^c\mathcal{C}}^e & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{K}_{\Lambda^c\mathcal{G}}^e & \mathbf{K}_{\Lambda^c\mathcal{G}}^e & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{K}_{\Lambda^c\mathcal{C}}^e & \mathbf{K}_{\Lambda^c\mathcal{G}}^e & \mathbf{K}_{\Lambda^c\mathcal{C}}^e & \mathbf{0} & \mathbf{0} & \mathbf{0} \end{bmatrix}. \quad (120)$$

For the sake of simplicity, the specific contributions of $\mathbf{K}_{\varphi\varphi}^e$, $\mathbf{K}_{\theta\theta}^e$, etc. are not provided here. In particular, $\mathbf{K}_{(\bullet)_1(\bullet)_2}^e$ denotes linearization of $\mathbf{R}_{(\bullet)_1}^e$ w.r.t. $(\bullet)_2$ where $(\bullet)_1, (\bullet)_2 \in \{\tilde{\mathcal{C}}, \mathcal{D}\}$.

For the static condensation, we first consider the full system of linear equations

$$\begin{bmatrix} \mathbf{K}_{\tilde{\mathcal{C}}\tilde{\mathcal{C}}}^e & \mathbf{K}_{\tilde{\mathcal{C}}\mathcal{D}}^e \\ \mathbf{K}_{\mathcal{D}\tilde{\mathcal{C}}}^e & \mathbf{K}_{\mathcal{D}\mathcal{D}}^e \end{bmatrix} \begin{bmatrix} \Delta\mathbf{q}_{\tilde{\mathcal{C}}}^e \\ \Delta\mathbf{q}_{\mathcal{D}}^e \end{bmatrix} = - \begin{bmatrix} \mathbf{R}_{\tilde{\mathcal{C}}}^e \\ \mathbf{R}_{\mathcal{D}}^e \end{bmatrix}, \quad (121)$$

for the unknowns $\Delta\mathbf{q}_{\tilde{\mathcal{C}}}^e$ and $\Delta\mathbf{q}_{\mathcal{D}}^e$. Solving the full system of linear equations after assembling the element contributions in (121) is very demanding, but can be reduced considerably by employing static condensation. On element level, from (121)₂ we obtain

$$\Delta\mathbf{q}_{\mathcal{D}}^e = - \left((\mathbf{K}_{\mathcal{D}\mathcal{D}}^e)^{-1} \mathbf{R}_{\mathcal{D}}^e + (\mathbf{K}_{\mathcal{D}\mathcal{D}}^e)^{-1} \mathbf{K}_{\mathcal{D}\tilde{\mathcal{C}}}^e \Delta\mathbf{q}_{\tilde{\mathcal{C}}}^e \right). \quad (122)$$

Afterwards, we eliminate $\Delta\mathbf{q}_{\mathcal{D}}^e$ by inserting (122) into (121)₁, which yields

$$\underbrace{\left(\mathbf{K}_{\tilde{\mathcal{C}}\tilde{\mathcal{C}}}^e - \mathbf{K}_{\tilde{\mathcal{C}}\mathcal{D}}^e (\mathbf{K}_{\mathcal{D}\mathcal{D}}^e)^{-1} \mathbf{K}_{\mathcal{D}\tilde{\mathcal{C}}}^e \right)}_{\widehat{\mathbf{K}}^e} \Delta\mathbf{q}_{\tilde{\mathcal{C}}}^e = - \underbrace{\left(\mathbf{R}_{\tilde{\mathcal{C}}}^e - \mathbf{K}_{\tilde{\mathcal{C}}\mathcal{D}}^e (\mathbf{K}_{\mathcal{D}\mathcal{D}}^e)^{-1} \mathbf{R}_{\mathcal{D}}^e \right)}_{\widehat{\mathbf{R}}^e}. \quad (123)$$

This static condensation procedure eliminates the number of unknowns for the system of linear equations to the minimal set $\Delta\mathbf{q}_{\tilde{\mathcal{C}}}^e$ with the reduced residual vector $\widehat{\mathbf{R}}^e$ and the associated tangent matrix $\widehat{\mathbf{K}}^e$. Accordingly, the computational effort to obtain the solution is significantly reduced. After computation of $\Delta\mathbf{q}_{\tilde{\mathcal{C}}}^e$, we are able to compute $\Delta\mathbf{q}_{\mathcal{D}}^e$ via relation (122).

B Analytical convergence analysis example: analytical computations

The assumed analytical solutions in (101) build the starting point of the analytical computations, that we need to provide for the numerical example in Sect. 7.2. In the following, we provide the related computations in order to compute the source terms which are necessary to plug in (102):

- With (1), (16), (17), and (18) we are able to compute the kinematic relations

$$\begin{aligned}\mathbf{F}^a &= \nabla_{\mathbf{X}} \varphi^a(\mathbf{X}) \\ &= (1 + 2\Gamma_1 X_1^2) \mathbf{e}_1 \otimes \mathbf{e}_1 + (1 + 2\Gamma_2 X_2^2) \mathbf{e}_2 \otimes \mathbf{e}_2 + (1 + 2\Gamma_3 X_3^2) \mathbf{e}_3 \otimes \mathbf{e}_3,\end{aligned}\quad (124)$$

$$\mathbf{C}^a = (\mathbf{F}^a)^\top \mathbf{F}^a, \quad (125)$$

$$\mathbf{G}^a = \frac{1}{2} \mathbf{C}^a \times \mathbf{C}^a, \quad (126)$$

$$C^a = \frac{1}{3} \mathbf{C}^a : \mathbf{G}^a. \quad (127)$$

- With (6), (10) we compute the gradients of the electric potential and the thermal field

$$\mathbf{E}_0^a = -\nabla_{\mathbf{X}} \Phi^a(\mathbf{X}), \quad \gamma^a = \nabla_{\mathbf{X}} \theta^a(\mathbf{X}). \quad (128)$$

- With (21) and $\mathbf{E}_0 = \partial_{\mathbf{D}_0} \mathcal{F}$ we are able to compute the Lagrangian electric displacement vector

$$\mathbf{D}_0^a = \frac{\varepsilon_r \varepsilon_0 \sqrt{C^a}}{f_\theta^a} (\mathbf{C}^a)^{-1} \mathbf{E}_0^a, \quad f_\theta^a = \frac{\theta^a}{\theta_R}. \quad (129)$$

- With (21), the derivatives of the energy density function are given by

$$\partial_{\mathbf{C}} \mathcal{F}^a = f_\theta^a \left(a \mathbf{I} + \frac{1}{2 \varepsilon_r \varepsilon_0 \sqrt{C^a}} \mathbf{D}_0^a \otimes \mathbf{D}_0^a \right), \quad (130)$$

$$\partial_{\mathbf{G}} \mathcal{F}^a = f_\theta^a b \mathbf{I}, \quad (131)$$

$$\begin{aligned}\partial_C \mathcal{F}^a &= -3\beta e (\theta^a - \theta_R) \\ &\quad + f_\theta^a \left(\frac{c}{2} \left(1 - \frac{1}{\sqrt{C^a}} \right) - \frac{d}{2C^a} - \frac{1}{4\varepsilon_r \varepsilon_0 (C^a)^{3/2}} \mathbf{D}_0^a \cdot (\mathbf{C}^a \mathbf{D}_0^a) \right).\end{aligned}\quad (132)$$

- With (42)_{8,7,6}, we eventually compute the Lagrange multipliers

$$\Lambda^{C^a} = \partial_C \mathcal{F}^a, \quad (133)$$

$$\Lambda^{\mathbf{G}^a} = \partial_{\mathbf{G}} \mathcal{F}^a + \frac{1}{3} \partial_C \mathcal{F}^a \mathbf{C}^a, \quad (134)$$

$$\Lambda^{C^a} = \partial_C \mathcal{F}^a + \Lambda^{\mathbf{G}^a} \times \mathbf{C}^a + \frac{1}{3} \Lambda^{C^a} \mathbf{G}^a. \quad (135)$$

With the above equations, with (42)₂, and (27), we are able to compute the desired first and second Piola-Kirchhoff stress tensor, and the Piola heat flux vector

$$\mathbf{P}^a = \mathbf{F}^a \mathbf{S}^a, \quad \mathbf{S}^a = 2 \Lambda^{C^a}, \quad \mathbf{Q}^a = \frac{k_0}{C^a} \mathbf{G}^a \gamma^a. \quad (136)$$

References

- [Bal76] BALL, J. M. Convexity conditions and existence theorems in nonlinear elasticity. In: *Archive for Rational Mechanics and Analysis*, 63(4): 337–403, 1976. DOI: 10.1007/BF00279992.

- [Ber+18] BERLINGER, F., DUDUTA, M., GLORIA, H., CLARKE, D., NAGPAL, R., and WOOD, R. A Modular Dielectric Elastomer Actuator to Drive Miniature Autonomous Underwater Vehicles. In: *2018 IEEE International Conference on Robotics and Automation (ICRA)*. 2018, pp. 3429–3435. DOI: 10.1109/ICRA.2018.8461217.
- [BJH18] BETSCH, P., JANZ, A., and HESCH, C. A mixed variational framework for the design of energy-momentum schemes inspired by the structure of polyconvex stored energy functions. In: *Computer Methods in Applied Mechanics and Engineering*, 335: 660–696, 2018. DOI: 10.1016/j.cma.2018.01.013.
- [Bet16] BETSCH, P., ed. *Structure-preserving Integrators in Nonlinear Structural Dynamics and Flexible Multibody Dynamics*. Vol. 565. CISM International Centre for Mechanical Sciences Courses and Lectures. Springer-Verlag, 2016. ISBN: 978-3-319-31877-6. DOI: 10.1007/978-3-319-31879-0.
- [BGO15] BONET, J., GIL, A. J., and ORTIGOSA, R. A computational framework for polyconvex large strain elasticity. In: *Computer Methods in Applied Mechanics and Engineering*, 283: 1061–1094, 2015. DOI: 10.1016/j.cma.2014.10.002.
- [BGO16] BONET, J., GIL, A. J., and ORTIGOSA, R. On a tensor cross product based formulation of large strain solid mechanics. In: *International Journal of Solids and Structures*, 84: 49–63, 2016. DOI: 10.1016/j.ijsolstr.2015.12.030.
- [BGW16] BONET, J., GIL, A. J., and WOOD, R. D. *Nonlinear Continuum Mechanics for Finite Element Analysis: Statics*. Cambridge University Press, 2016. DOI: 10.1017/CB09780511755446.
- [Bon+21] BONET, J., LEE, C. H., GIL, A. J., and GHAVAMIAN, A. A first order hyperbolic framework for large strain computational solid dynamics. Part III: Thermo-elasticity. In: *Computer Methods in Applied Mechanics and Engineering*, 373: 113505, 2021. ISSN: 0045-7825. DOI: <https://doi.org/10.1016/j.cma.2020.113505>.
- [CG17] CONDE MARTÍN, S. and GARCÍA ORDEN, J. C. On Energy-Entropy-Momentum integration methods for discrete thermo-visco-elastodynamics. In: *Computers & Structures*, 181: 3–20, 2017. DOI: 10.1016/j.compstruc.2016.05.010.
- [de 82] DE BOER, R. *Vektor- und Tensorrechnung für Ingenieure*. Springer-Verlag Berlin Heidelberg, 1982. ISBN: 978-3-540-11834-3.
- [Fra+19] FRANKE, M., ORTIGOSA, R., JANZ, A., GIL, A., and BETSCH, P. A mixed variational framework for the design of energy-momentum integration schemes based on convex multi-variable electro-elastodynamics. In: *Computer Methods in Applied Mechanics and Engineering*, 351: 109–152, 2019. DOI: 10.1016/j.cma.2019.03.036.
- [Fra+22a] FRANKE, M., ORTIGOSA, R., MARTÍNEZ-FRUTOS, J., GIL, A., and BETSCH, P. A thermodynamically consistent time integration scheme for non-linear thermo-electro-mechanics. In: *Computer Methods in Applied Mechanics and Engineering*, 389: 114298, 2022. DOI: 10.1016/j.cma.2021.114298.
- [Fra+18] FRANKE, M., JANZ, A., SCHIEBL, M., and BETSCH, P. An energy-momentum consistent integration scheme using a polyconvexity-based framework for non-linear thermo-elastodynamics. In: *International Journal for Numerical Methods in Engineering*, 115(5): 549–577, 2018. DOI: 10.1002/nme.5816.
- [Fra+22b] FRANKE, M., ZÄHRINGER, F., HILLE, M., PFEFFERKORN, R., and VALDES Y BECK, V. *moofeKIT: matlab object-oriented finite element kit*. Version v1.0.0. 2022. DOI: 10.5281/zenodo.7129458.

- [GH97] GHANDI, K. and HAGOOD, N. W. Hybrid finite element model for phase transitions in nonlinear electromechanically coupled material. In: *Smart Structures and Materials 1997: Mathematics and Control in Smart Structures*. Ed. by Vasundara V. Varadan and Jagdish Chandra. Vol. 3039. International Society for Optics and Photonics. SPIE, 1997, pp. 97–112. DOI: 10.1117/12.276529.
- [GO16] GIL, A. J. and ORTIGOSA, R. A new framework for large strain electromechanics based on convex multi-variable strain energies: variational formulation and material characterisation. In: *Computer Methods in Applied Mechanics and Engineering*, 302: 293–328, 2016. DOI: 10.1016/j.cma.2015.11.036.
- [Gon00] GONZALEZ, O. Exact energy and momentum conserving algorithms for general models in nonlinear elasticity. In: *Computer Methods in Applied Mechanics and Engineering*, 190: 1763–1783, 2000. DOI: 10.1016/S0045-7825(00)00189-4.
- [GS08] GONZALEZ, O. and STUART, A. M. *A first course in Continuum Mechanics*. Cambridge University Press, 2008. DOI: 10.1017/CB09780511619571.
- [Gon96] GONZALEZ, O. Time integration and discrete Hamiltonian systems. In: *Journal of Nonlinear Science*, 6(5): 449–467, 1996. DOI: 10.1007/BF02440162.
- [Gre84] GREENSPAN, D. Conservative numerical methods for $\ddot{x} = f(x)$. In: *Journal of Computational Physics*, 56(1): 28–41, 1984. DOI: 10.1016/0021-9991(84)90081-0.
- [GB10] GROSS, M. and BETSCH, P. Energy-momentum consistent finite element discretization of dynamic finite viscoelasticity. In: *International Journal for Numerical Methods in Engineering*, 81(11): 1341–1386, 2010. DOI: 10.1002/nme.2729.
- [HB11] HESCH, C. and BETSCH, P. Energy-momentum consistent algorithms for dynamic thermomechanical problems—Application to mortar domain decomposition problems. In: *International Journal for Numerical Methods in Engineering*, 86(11): 1277–1302, 2011. DOI: 10.1002/nme.3095.
- [Hol00] HOLZAPFEL, G. *Nonlinear Solid Mechanics: A Continuum Approach for Engineering*. John Wiley & Sons Ltd, 2000. ISBN: 978-0-471-82319-3.
- [HVS15] HOSSAIN, M., VU, D., and STEINMANN, P. A comprehensive characterization of the electro-mechanically coupled properties of VHB 4910 polymer. In: *Archive of Applied Mechanics*, 85: 523–537, 2015. DOI: 10.1007/s00419-014-0928-9.
- [Kof+03] KOFOD, G., SOMMER-LARSEN, P., KORNBLUH, R., and PELRINE, R. Actuation Response of Polyacrylate Dielectric Elastomers. In: *Journal of Intelligent Material Systems and Structures*, 14(12): 787–793, 2003. DOI: 10.1177/104538903039260.
- [Li+13] LI, T., KEPLINGER, C., BAUMGARTNER, R., BAUER, S., YANG, W., and SUO, Z. Giant voltage-induced deformation in dielectric elastomers near the verge of snap-through instability. In: *Journal of the Mechanics and Physics of Solids*, 61(2): 611–628, 2013. DOI: 10.1016/j.jmps.2012.09.006.
- [Lia+20] LIAO, Z., HOSSAIN, M., YAO, X., MEHNERT, M., and STEINMANN, P. On thermo-viscoelastic experimental characterization and numerical modelling of VHB polymer. In: *International Journal of Non-Linear Mechanics*, 118: 103263, 2020. DOI: 10.1016/j.ijnonlinmec.2019.103263.
- [MH85] MACNEAL, R. and HARDER, R. A proposed standard set of problems to test finite element accuracy. In: *Finite Elements in Analysis and Design*, 1(1): 3–20, 1985. DOI: 10.1016/0168-874X(85)90003-4.
- [Maj19] MAJIDI, C. Soft-Matter Engineering for Soft Robotics. In: *Advanced Materials Technologies*, 4(2): 1800477, 2019. DOI: 10.1002/admt.201800477.

- [MH94] MARSDEN, J. E. and HUGHES, T. J. R. *Mathematical foundations of elasticity*. Ed. by Dover Civil and Mechanical Engineering. 1994.
- [MHS18] MEHNERT, M., HOSSAIN, M., and STEINMANN, P. Numerical modeling of thermo-electro-viscoelasticity with field-dependent material parameters. In: *International Journal of Non-Linear Mechanics*, 106: 13–24, 2018. DOI: 10.1016/j.ijnonlinmec.2018.08.016.
- [MHS19] MEHNERT, M., HOSSAIN, M., and STEINMANN, P. Experimental and numerical investigations of the electro-viscoelastic behavior of VHB 4905TM. In: *European Journal of Mechanics - A/Solids*, 77: 103797, 2019. DOI: 10.1016/j.euromechsol.2019.103797.
- [MHS21a] MEHNERT, M., HOSSAIN, M., and STEINMANN, P. A complete thermo-electro-viscoelastic characterization of dielectric elastomers, Part II: Continuum modeling approach. In: *Journal of the Mechanics and Physics of Solids*, 157: 104625, 2021. DOI: 10.1016/j.jmps.2021.104625.
- [MHS21b] MEHNERT, M., HOSSAIN, M., and STEINMANN, P. A complete thermo–electro–viscoelastic characterization of dielectric elastomers, Part I: Experimental investigations. In: *Journal of the Mechanics and Physics of Solids*, 157: 104603, 2021. DOI: 10.1016/j.jmps.2021.104603.
- [MPS17] MEHNERT, M., PELTERET, J.-P., and STEINMANN, P. Numerical modelling of nonlinear thermo-electro-elasticity. In: *Mathematics and Mechanics of Solids*, 22(11): 2196–2213, 2017. DOI: 10.1177/1081286517729867.
- [Orb+21] ORBAUGH, D., WALKER, C., ROSSET, S., and ANDERSON, I. Jumping into virtual reality with dielectric elastomer sensors. In: *Electroactive Polymer Actuators and Devices (EAPAD) XXIII*. Ed. by Iain A. Anderson, Herbert R. Shea, and John D. W. Madden. Vol. 11587. International Society for Optics and Photonics. SPIE, 2021, pp. 17–31. DOI: 10.1117/12.2584971.
- [Ort+18] ORTIGOSA, R., FRANKE, M., JANZ, A., GIL, A., and BETSCH, P. An energy–momentum time integration scheme based on a convex multi-variable framework for non-linear electro-elastodynamics. In: *Computer Methods in Applied Mechanics and Engineering*, 339: 1–35, 2018. DOI: 10.1016/j.cma.2018.04.021.
- [OG16a] ORTIGOSA, R. and GIL, A. J. A new framework for large strain electromechanics based on convex multi-variable strain energies: Conservation laws, hyperbolicity and extension to electro-magneto-mechanics. In: *Computer Methods in Applied Mechanics and Engineering*, 309: 202–242, 2016. DOI: 10.1016/j.cma.2016.05.019.
- [OG16b] ORTIGOSA, R. and GIL, A. J. A new framework for large strain electromechanics based on convex multi-variable strain energies: Finite Element discretisation and computational implementation. In: *Computer Methods in Applied Mechanics and Engineering*, 302: 329–360, 2016. DOI: 10.1016/j.cma.2015.12.007.
- [Ort+20] ORTIGOSA, R., GIL, A., MARTÍNEZ-FRUTOS, J., FRANKE, M., and BONET, J. A new energy–momentum time integration scheme for non-linear thermo-mechanics. In: *Computer Methods in Applied Mechanics and Engineering*, 372: 113395, 2020. DOI: 10.1016/j.cma.2020.113395.
- [Pel+00] PELRINE, R., KORNBLUH, R., PEI, Q., and JOSEPH, J. High-Speed Electrically Actuated Elastomers with Strain Greater Than 100 %. In: *Science*, 287(5454): 836–839, 2000. DOI: 10.1126/science.287.5454.836.
- [PKJ98] PELRINE, R. E., KORNBLUH, R. D., and JOSEPH, J. P. Electrostriction of polymer dielectrics with compliant electrodes as a means of actuation. In: *Sensors and Actuators A: Physical*, 64(1): 77–85, 1998. DOI: 10.1016/S0924-4247(97)01657-9.

- [Pel+02] PELRINE, R., KORNBLUH, R. D., PEI, Q., STANFORD, S., OH, S., ECKERLE, J., FULL, R. J., ROSENTHAL, M. A., and MEIJER, K. *Dielectric elastomer artificial muscle actuators: toward biomimetic motion*. 2002. DOI: 10.1117/12.475157.
- [Poy+18] POYA, R., GIL, A. J., ORTIGOSA, R., SEVILLA, R., BONET, J., and WALL, W. A. A curvilinear high order finite element framework for electromechanics: From linearised electroelasticity to massively deformable dielectric elastomers. In: *Computer Methods in Applied Mechanics and Engineering*, 329: 75–117, 2018. DOI: 10.1016/j.cma.2017.09.020.
- [SN03] SCHRÖDER, J. and NEFF, P. Invariant formulation of hyperelastic transverse isotropy based on polyconvex free energy functions. In: *International Journal of Solids and Structures*, 40: 401–445, 2003. DOI: 10.1016/S0020-7683(02)00458-4.
- [SNB05] SCHRÖDER, J., NEFF, P., and BALZANI, D. A variational approach for materially stable anisotropic hyperelasticity. In: *International Journal of Solids and Structures*, 42: 4352–4371, 2005. DOI: 10.1016/j.ijsolstr.2004.11.021.
- [Sch+12] SCHWAAB, H., GRÜNBIHLER, H., SUPANCIC, P., and KAMLAH, M. Macroscopical nonlinear material model for ferroelectric materials inside a hybrid finite element formulation. In: *International Journal of Solids and Structures*, 49(3): 457–469, 2012. DOI: 10.1016/j.ijsolstr.2011.10.015.
- [ST92] SIMO, J. and TARNOW, N. The discrete energy-momentum method. Conserving algorithms for nonlinear elastodynamics. In: *Zeitschrift für angewandte Mathematik und Physik ZAMP*, 43: 757–792, 1992. DOI: 10.1007/BF00913408.
- [Ver+13] VERTECHY, R., BERSELLI, G., CASTELLI, V. P., and BERGAMASCO, M. Continuum thermo-electro-mechanical model for electrostrictive elastomers. In: *Journal of Intelligent Material Systems and Structures*, 24(6): 761–778, 2013. DOI: 10.1177/1045389X12455855.

In total 49 references.